

Product Name:	CPU WG26 output IC reader access control,cpu reader		
Model:	EA-96G	Working Voltage:	9VDC-16VDC
Operating Current:	≤ 120mA	Card Frequency:	13.56MHz
Response Time:	<0.1s (reading cards)	Communication Interface:	Wiegand26
Support Card:	SHC1112 Card	Reading Distance:	3.5cm-5.5cm
Transmission Distance:	< 100 meters	Working Environment:	0°C ~ 60°C
Storage Temperature:	-20°C ~ 70°C	Card Operation:	Read the card serial number or the user-defined card number
Protection:	Power reverse protection, data wire voltage protection, ± 15v	Dimensions:	85mm*85mm*20mm

What Features of our CPU reader?



- ♦ Support the ISO14443A protocol.
- Card number and key can be user-defined.
- Fully sealed design, epoxy seal, waterproof and dust proof.
- With SM7 secret algorithm and triple recognition function, achieve the uniqueness of the card number, and the data are encrypted to meet the requirements of high security.
- ♦ Proprietary Wiegand from 26 bit to 122 bit output, card number taken from CPU SHC1112 card's specific block with key verified.
- ♦ Customer can define the card reader's signal output format, and can set the unique protection of the KEY and card number locations.

IN-KIND SHOOTING





OFFICE SHOW













CUSTOMER














EXHIBITION



CERTIFICATE



HOW TO COOPERATION

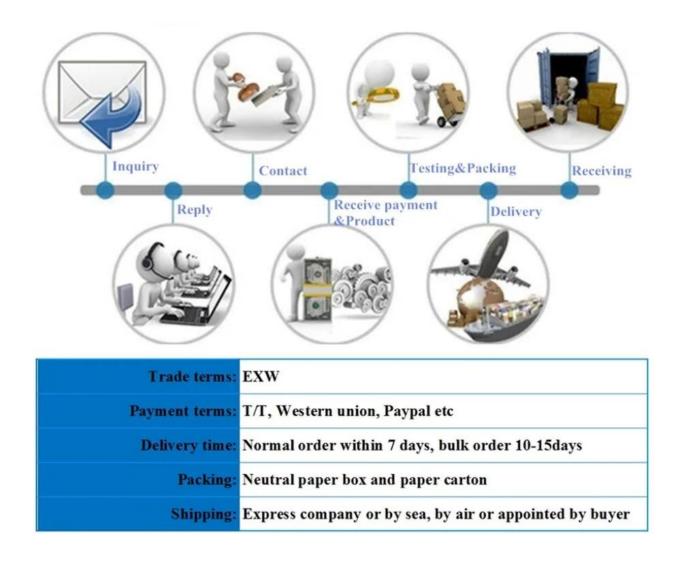

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

Q: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.