

Cigarette smoke detector



Parameter	
Name:	Cigarette smoke detector
Size:	Ø106mm*59mm
Working Voltage:	9V 6F22 battery
Standby Current:	≤15uA
Alarm Current:	≤56mA
Battery Working Life:	Less than 1 year
Power Indicator:	Red LED
Alarm Indicator:	Red LED flash blink
Sound Pressure:	85dB/m
Working Temperature:	-10°C~50°C
Working Humidity:	≤95%RH
Transmitting Distance:	<100m (open area)
Execute criterion:	EN14604
Detecting area:	40 square meters when installation height between 6 to 12 meters. 20 square meters when installation height within 6 meters.

What's the features of our cigarette smoke detector?



9V 6F22 battery,wireless output 315MHz or433MHz

Sound&flash alarm wireless fire alarm smoke detector

Dust-proof,moth-proof and anti-Interference function

Suitable for detecting the smoke in house,shop,hotel...


2 years quanlity,welcome to do OEM and ODM

IN-KIND SHOOTING



APPLICATION

Standalone Gas detector

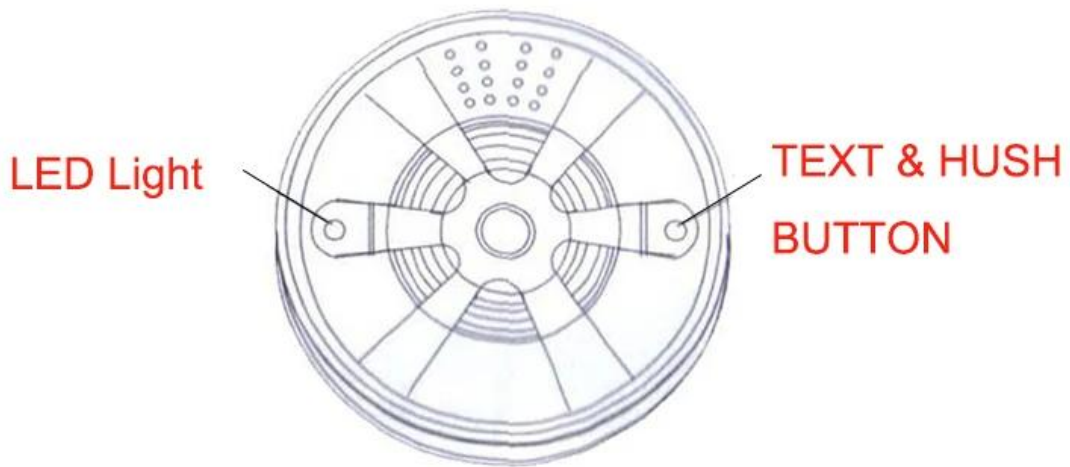

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

HOW ABOUT OTHER CHOICE?

