

# Wired magnetic contact sensor

*NC/NO code mode optional*

*20±5(mm) gap distance*

*MAX voltage≤100V DC,MAX current≤500mA*

*Suitable for wooden door or window*

*Fireproof ABS material shell*

*White/Brown color optional*

*8g weight*

**SMQT®**



## • Parameter

**SMQT®**

Parameter	
Product name	Concealed magnetic contact sensor
Model	EB-135
Dimension	Φ10 ×18.5(mm)
Code mode	NO/NC(optional)
Gap	20±5(mm)
Max voltage	≤100V DC
Max current	≤500mA
Max rating	≤10W
Color	Brown/White(optional)
Suit for	wooden door or window
Material	Fireproof ABS housing
Working temperature	-10 °C~50 °C
Net weight	8g

## • In-kind shooting

**SMQT®**



• *Feature*

**SMQT**



# Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to



## Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

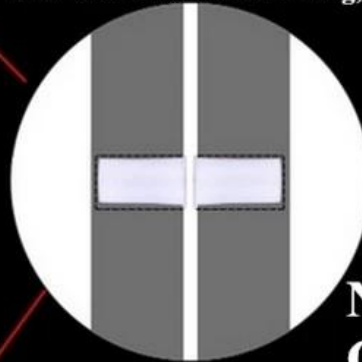


Notice:  
Gap < 2cm



## Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

## 2 Color optional

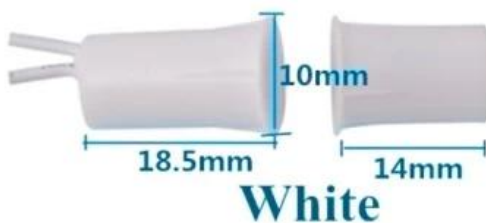

## • Packaging & shipping

SMQT®

Packaging list	
Product name	Concealed magnetic contact sensor EB-135
Qty	2000 pcs per carton
Carton size	38*30*30(cm)
Weight	21kg



## • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....