


Drilling installation magnetic contact sensor with NC output

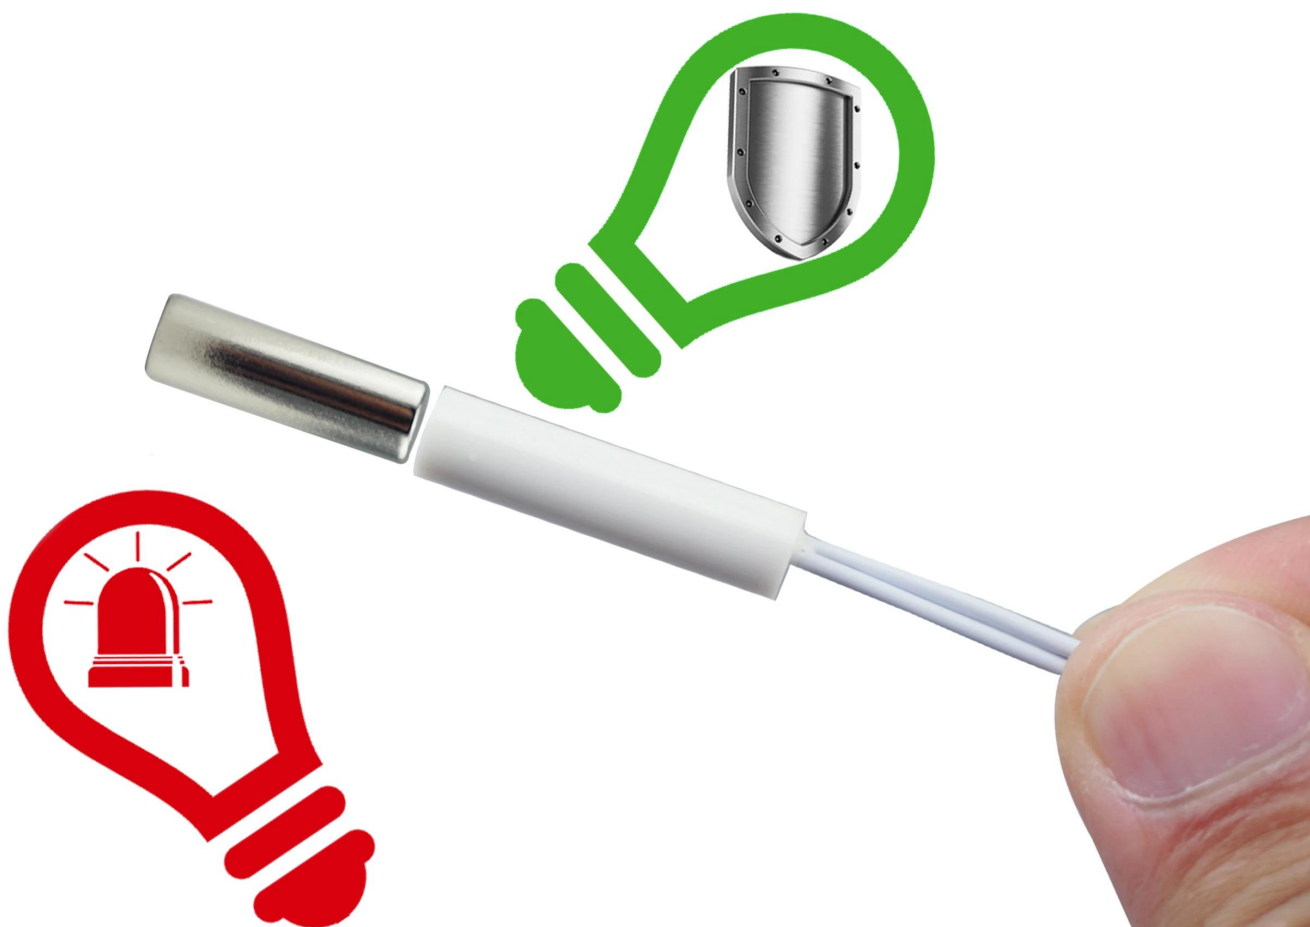

EB-135D'S MAIN PARAMETER

| | |
|---------------------------|---|
| Product Name: | Drilling installation magnetic contact sensor with NC output |
| Model number: | EB-135D |
| Working voltage: | Max DC 100 |
| Working current: | Max 0.5A |
| Power consumption: | 10W |
| Interface port: | NC/COM |
| Induction gap: | 15~25mm |
| Size: | Reed part:10(Diameter)*25(H)(mm) Magnet part:7(Diameter)*15(H)(mm) |
| Insatallation way: | Embedded installation |
| Suitable for: | All kinds of door access control system and burglar alarm system |
| Material: | Copper housing+ PCB board+Reed switch |
| Housing color: | White and silver |
| Weight: | Unit:8.5g 40 pairs per bag, per bag weight 340g |

| | |
|-----------|------------------|
| Warranty: | 2 years warranty |
| OEM: | Welcome OEM |

EB-135D'S FEATURE SHOW

ABS material shell




Size




:mm

NC mode working principle

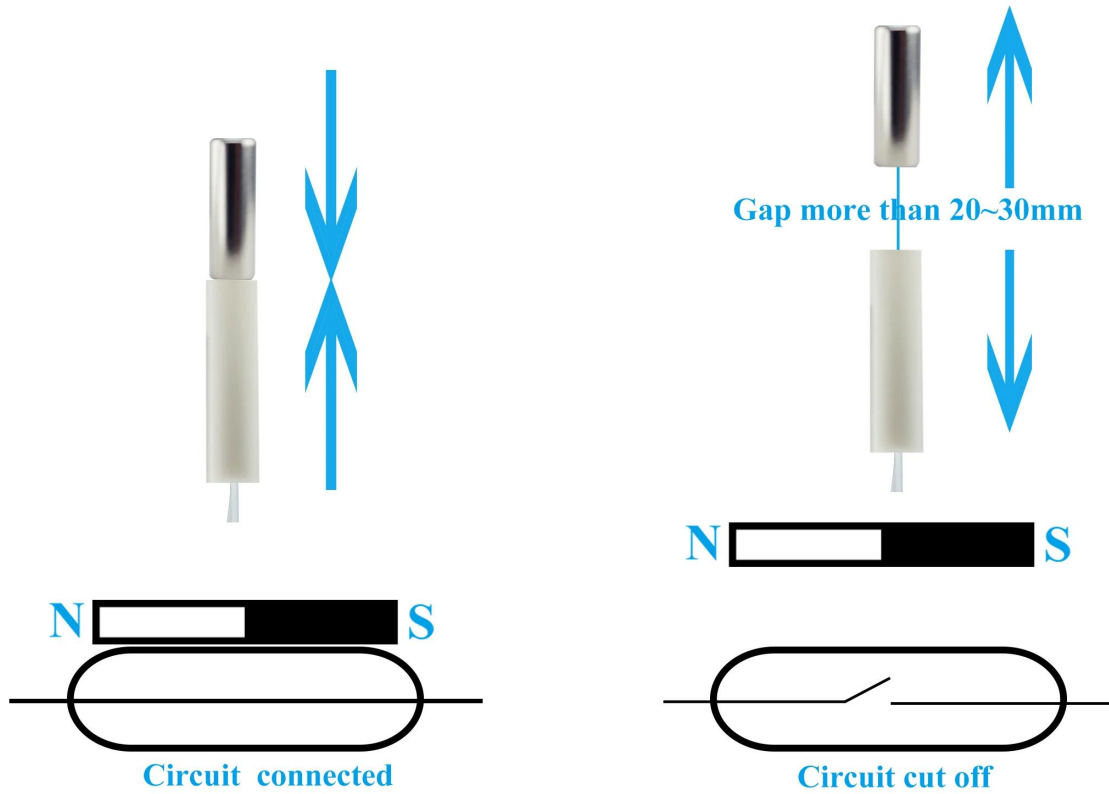

Installation

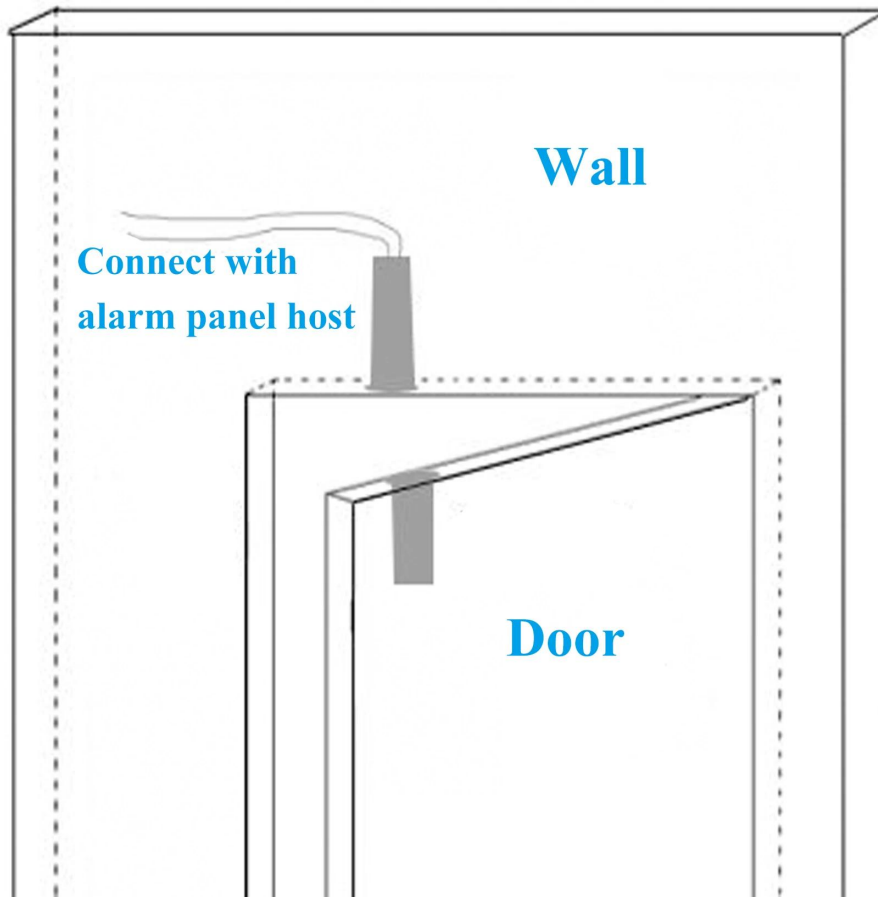

Packaging



40 pairs per bag

HOW ABOUT OTHER CHOICE?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

