

● Parameter

SMQT®

Dimension	92L*63W*23H (mm)
Power supply	DC 4.5v ~ 5.5v
Transmission rate	300bps ~ 115200bps
Serial protocol	TCP/UDP/IP/ICMP, Ethernet, ARP
Communication interface	Ethernet (10Base-T), RS232/485 with terminal switch

● Introduction

SMQT®

Having TCP Server, TCP Client, UDP, virtual serial, point to point connections five operating modes;

User network-based software does not require any modification can communicate with the C2000 N2A1;

By installing our free software virtual serial port, serial port user-based software does not require any modifications can communicate with the C2000 N2A1;

The need for the development of user software, we provide free communication dynamic library, set dynamic library or OCX controls

Browser, or set up a dynamic set of software libraries to set parameters;

Low-power design, no heatsink

Dual Watchdog design, high stability

Power supply has over-current protection and anti-reverse function

● Dimesion Picture

SMQT®




Internet

Adapter (Input AC
220v Output DC
12v)

SW2 fail to set the
parameter by ON,
while succeed in
setting the parameter.

SW1 By ON, the device
works with the default
parameter (IP: 10.1.1.10,
subnet mask: 255.0.0.0).
By OFF, it works following
to the reset parameter.

1 T-
2 T+
3 R+
4 R-

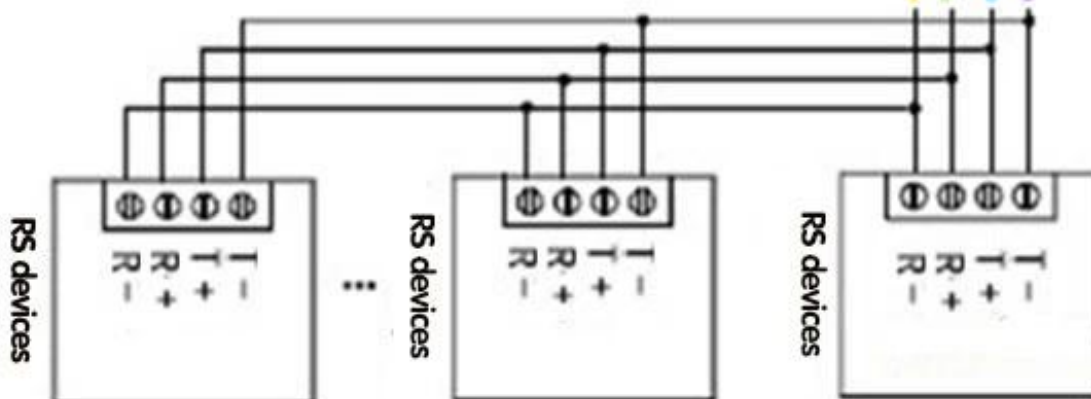

● Packing list

SMQT

QTY	20pcs/CTN
Carton dimension	42.8L*36.6W*29.8H(cm)
Gross weight	13.22kg