

## ● Parameter

SMQT®

Dimensions	85L * 52W * 25H (mm)
Standard Structure	Fireproof materials mixed resin
Electrical Performance	Current 3A @ 36VDC maximum durability
Contact output	NO / NC / COM
Durability test	500,000 times aging tested
For Type	Applicable hollow frames and submerged electrical box
Temperature	-10 ~ + 55 °C (14-131F)
Applicable humidity	0 to 95% (relative humidity)
Panel Processing	Fireproof material naked surface treatment

## ● Introduction

SMQT®

1. Ultra-low-power design, lighting circuits can be connected in series, unipolar control.
2. For submerged hollow frames and electrical box.
3. Fireproof materials mixed resin.
4. hundred thousand times tested.


The exit button switch are infrared button and door release button. The button used with the access control system.

## ● Dimesion Picture

SMQT®





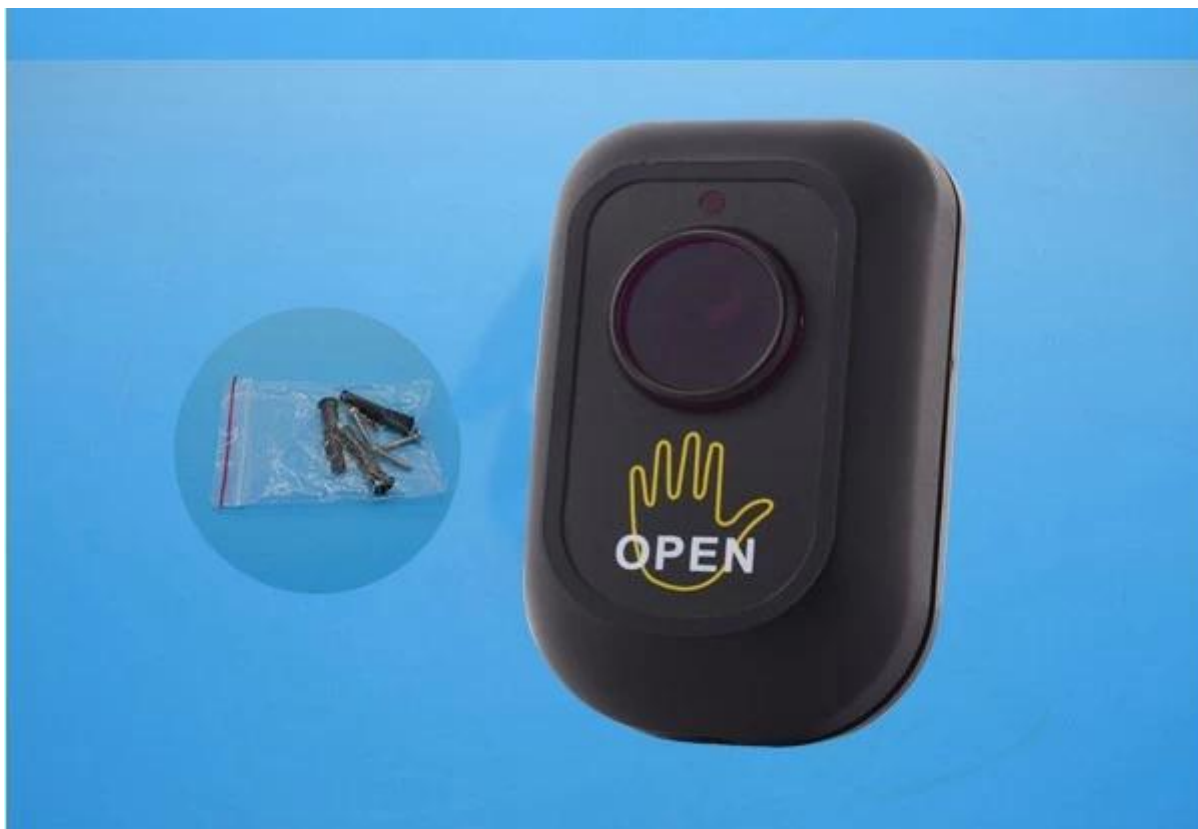

## ● Packing list

**SMQT**



Qty	100 pieces / box
Packing Specifications	46.5L * 37.5W * 28H (cm)
Packing weight	11.72Kg

## ● Office

**SMQT**



## ● Exhibitions

**SMQT**

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

