

## ● Parameter

SMQT®

Product number	EA-22A	EA-22B
Standard Structure	Aluminum panels, metal buttons	Aluminum panels, metal buttons
Electrical Performance	Current maximum durability 3A36VDC	Current maximum durability 3A36VDC
Durability test	500,000 times aging tested	500,000 times aging tested
For Type	Applicable hollow frames and submerged electrical box	Applicable hollow frames and submerged electrical box
Temperature	-10 ~ + 55 °C	-10 ~ + 55 °C
Applicable humidity	0 to 95% (relative humidity)	0 to 95% (relative humidity)
Panel Processing	Aluminum panels sandblasted	Aluminum panels sandblasted

## ● Introduction

SMQT®

Professional design, no mechanical failure.

Luxury design, beautiful and durable.

Access projects designated matching products.

500,000 tested durability.

Panel Processing: flash silver aluminum panel sandblasting.

For door type: for hollow frames and submerged electrical box apply.

Door release button EA-22A/B with waterproof function. The exit button material is metal finished. The push button switch with metal button, ABS button, touch button etc.


## ● Dimension Picture

SMQT®



## ● Installations

**SMQT**

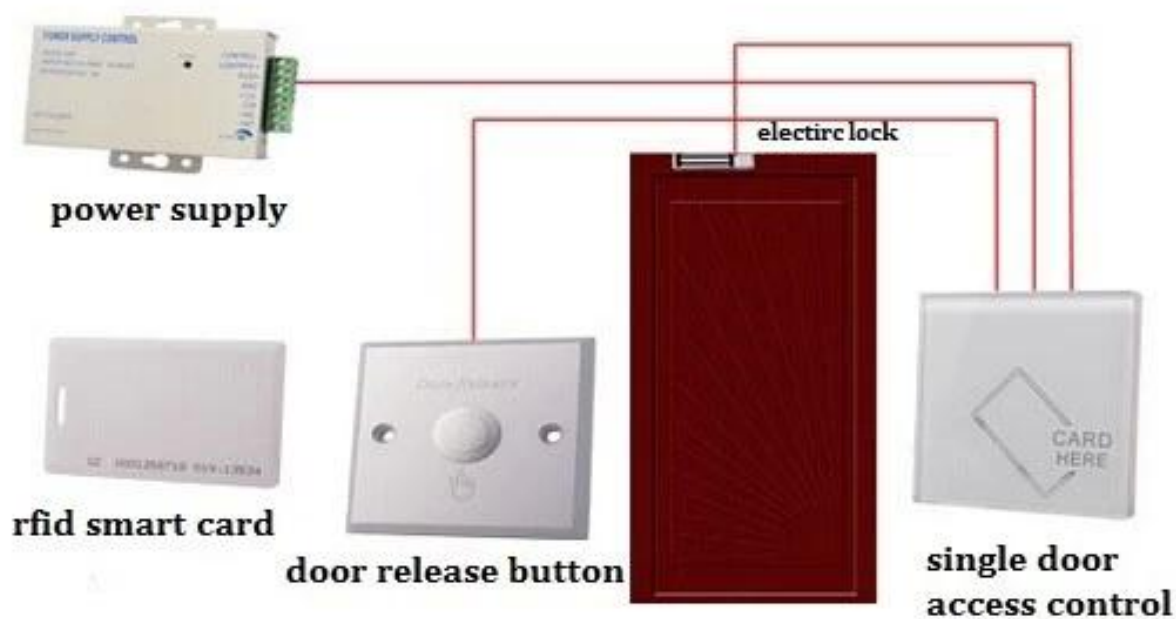

## ● Features

**SMQT**



**EA-22B**

## Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button

500,000 times mechanical test

### ● Packing list

**SMQT**



Product number	EA-22A	EA-22B
Qty	100 / box	100 / box
Packing Specifications	46.5L * 37.5W * 28H (cm)	46.5L * 37.5W * 28H (cm)
Packing weight	16Kg	25Kg

### ● Office

**SMQT**



## ● Exhibitions

**SMQT**

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

