■ Parameter SMQT

Spcification		
Product name	Plastic Door Release button	
Model	EA-26A/B/C	
Dimensions A	86 * 86 * 20 (mm)	
Dimensions B	86 * 86 * 20 (mm)	
Dimensions C	86 * 86 * 30 (mm)	
Standard Structure	Fireproof materials mixed resin	
Electrical Performance	Current maximum durability 3A36VDC	
Durability test	Hundred thousand times aging tested	
For Type	Applicable hollow frames and submerged electrical box	
Panel Processing	Fireproof material naked surface treatment	

Introduction
SMQT


It can be any combination of various shades of environment, highlighting the elegance; to create a modern, sleek, minimalist atmosphere.

User-friendly design, the details determine safety; large buttons, use handy.


High-end frame, flame, compressive strength, durable, safer and more reliable installation. Large wiring space, Phillips or slotted screwdriver to install.

Dimesion Picture

SMQT

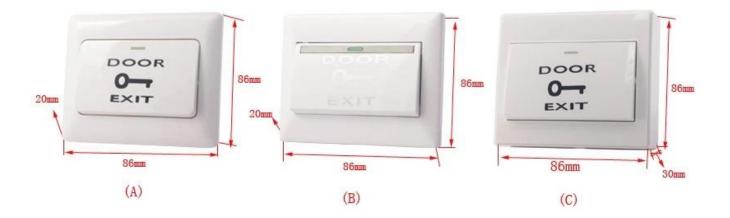

● Installations SMQT

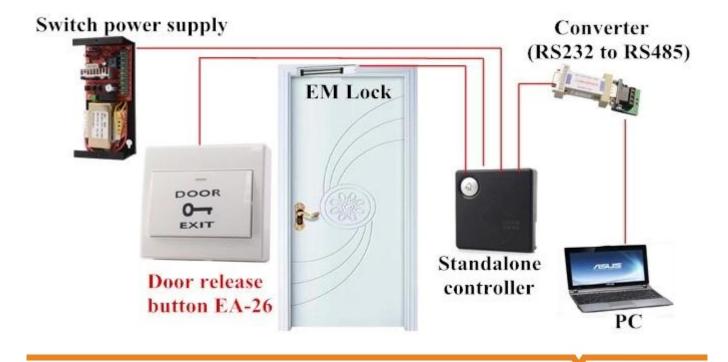

• Features SMQT

The price is cheaper, no computer knowledge decorators can be installed. Large wiring space, Phillips or slotted screwdriver to install.

High-end frame, flame, compressive strength, durable, safer and more reliable installation. User-friendly design, the details determine safety; large buttons, use handy.

Packing list SMOT

Packaging list		
Product Name	Plastic Door Release Button	
Qty	100 / box	
Packing Specifications	50L * 33W * 31H (cm)	
Packing weight	7.52Kg	







• Office SMQT













Exhibitions
SMQT

