

● Parameter

SMQT®

Operating Voltage	CD12V
Electric lock output	3A
Quiescent Current	30mA
Alarm output	20A
Reading distance	IC 3-6cm ID 5-8cm
Output short circuit protection time	100us
Storing user	2000
Opening hours	0-99s adjustable
Ambient temperature	-45 °C ~ 60 °C
Dimensions	120L * 58W * 18H

● Introduction

SMQT®

The single door access control with waterproof function, standalone reader rfid function. It with IC and ID mode.

New exterior design, Mercedes-Benz style, luxury, atmosphere, stable and safe.

Metal shell, waterproof anti-smashing design.

PC plastic sealed, fully sealed waterproof design.

Protection rating of IP68.

Key backlight, easy to use.


● Dimesion Picture

SMQT®



● Installations

SMQT®

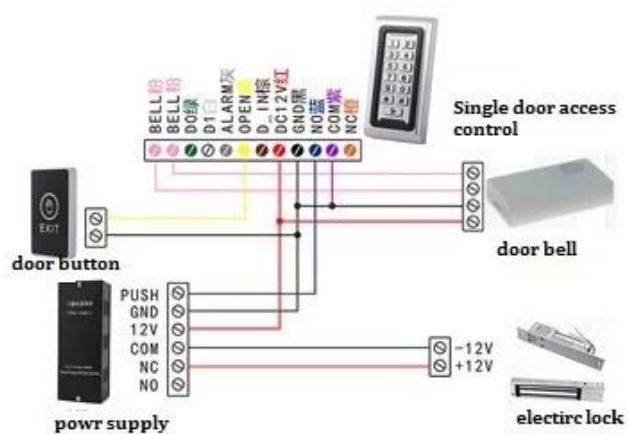

● Features

SMQT®



● Packing list

SMQT



Qty	22 / box
Packing Specifications	52L * 29W * 12H (cm)

Packing weight	12.32Kg
----------------	---------

● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....