

● Parameter

SMQT

Operating Voltage	DC12V
Quiescent Current	≤10uA
Alarm current	≤15mA
Operating temperature	-10 °C ~ + 50 °C
Working humidity	≤95% RH
Alarm	Wireless signal output / LED indicates an alarm
Monitoring area	20 m2
Sensitivity Level	Level 1
Alarm output	Relay output (NC)
Radio frequency	433MHZ / 315MHZ

● Introduction

SMQT

Industrial digital smoke detector wireless connected. The smoke alarm detector price is cheaper sensor for fire alarm system.






â



● Dimesion Picture

SMQT

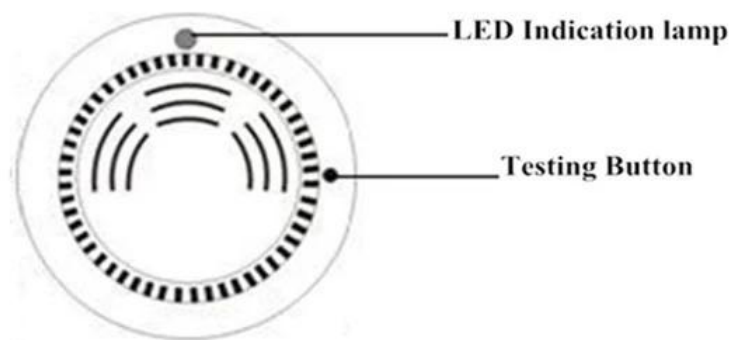

● Installations

SMQT



● Packing list

SMOT



Qty	108 / box
Packing Specifications	56.6 * 46.8 * 35.5 (cm)
Packing weight	25Kg

Office

SMQT



Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....