

● Parameter

SMQT®

Dimensions	65 * 30 * 17 (mm)
Operating Voltage	3.7V / 200mAh
Charging time	> 12h
Battery operating time at full load	≤ 1 Year
gap	40 ± 5mm
Radio frequency	315MHZ / 433MHZ / 868MHZ
Transmission distance	≤100m (open-air)

● Introduction

SMQT®

Fire-retardant casing material, security and stability.


Stable, stable performance, green.

Flexible transmission capacity, frequency stability options.

The wireless door contact sensor lock with 433Mhz or 868Mhz alarm frequency, suitable used in wooden door or window.

● Dimesion Picture

SMQT®

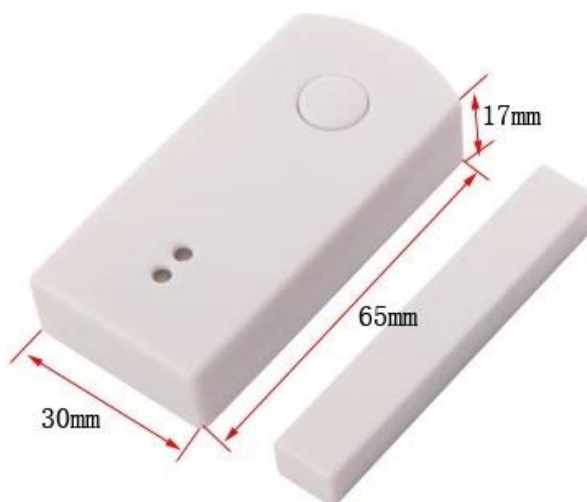

● Installations

SMQT®

Wireless Magnetic Contact Sensor



The unique door/window magnetic contact with the emergency button in security industry . make sure more safety for user;
 • Induce the door or window open or close and gap in 10mm, the wireless transmission up to 80 meter.



Stable, stable performance, green.
 Flexible transmission capacity, frequency stability options.

● Features

SMQT



Multifunctional, the new model, patented design.

Tradition, stability, durability
 Imported touch reed switch
 Fire-retardant casing material, security and stability.
 Comes with emergency button, an accessory, a variety of uses.



Built-in battery, used or release anytime.

Smart power-saving built-in battery design, the sensor also can work at home even though power cut out, comes with high-energy battery, sustainable use of uninterruptible power supply

Reed , A special magnetic switch

Imports Reed touch than the general mechanical switch of simple structure, small size, high speed, long working life, and strong anti-shock load, high operating reliability.



● Packing list

SMQT

Qty	200 / box
Packing Specifications	40 * 30 * 20 (cm)
Packing weight	10Kg

● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

