

| | |
|--------------------|------------------------------|
| Dimensions | 41L * 34W * 6.5H (mm) |
| Connection | NC / NO |
| Operating distance | 20 ± 5 (mm) |
| Maximum durability | ≤100VDC |
| Load current | ≤500mA |
| Working Power | ≤10W |
| Housing Material | ABS fireproof material shape |
| Colour | Brown / White |
| Scope | Non-ferrous door or window |
| product weight | 14g |




The magnetic contact sensor with wired and wireless mode. This model is a wired magnetic door contact switch used in alarm security. It features a back of adhesive tape to provide easy installation in the door or window. Ideal security office, home, shops, entrance. When someone illegally opens a door or window, it immediately sends an alarm signal.

the control panel receives the alarm signal immediately, the 120-decibel alarm sound.

The door magnetic contact sensor is used for door security system. The automatic door sensor is a wired alarm door sensor.


• Dimension

SMQT®

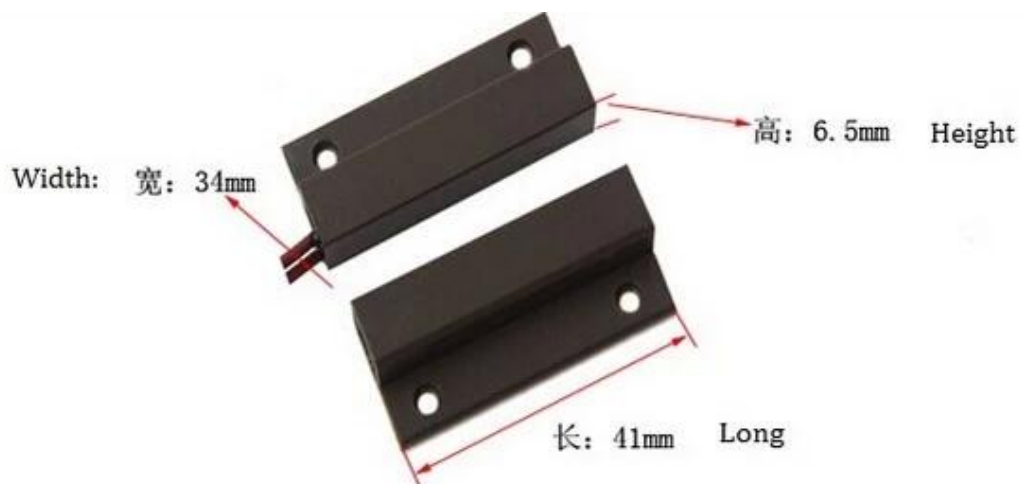

• Installation

SMQT®

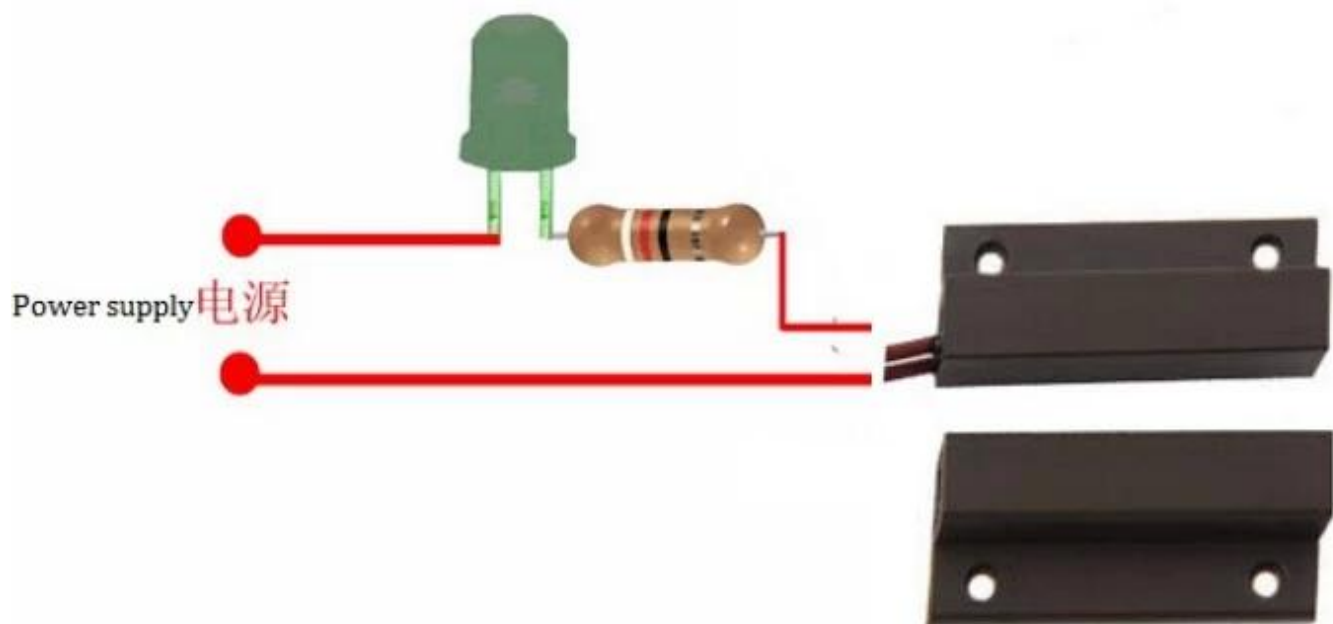

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

