Parameter SMQT

Specification		
Product name	Shutter Door Magnetic Contact	
Model number	EB-137A/B	
Dimensions	106L * 38W * 10H (mm)	
Connection	Normally open / normally closed	
Operating distance	$60 \pm 10 \text{ (mm)}$	
Maximum pressure	≤100VDC	
Load current	≤500mA	
Working Power	≤10W	
Housing Material	A zinc alloy B with bracket	
Scope	Shutter doors	
Product weight	254g / 154g	



Shutter door magnetic contact is intended to provide an alarm signal output garages, warehouses, factories, shops and other complex environments, typically made of aluminum alloy and zinc alloy, can work in harsh environments, seismic effect is strong, durable, easy to damage the surface of silver plating to prevent oxidation of the product, with a beautiful effects, line edge trapezoidal design can avoid being damaged forklifts, stainless steel protection tube can enhance product safety and reliability, the bracket can be adjusted shutter doors on the ground sensing distance iron switch.


Dimesion Picture SMQT




• Installations SMQT




• Features SMQT

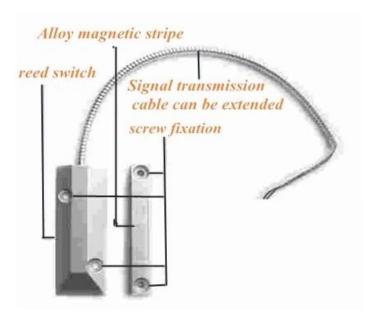



Packing list SMOT

Packaging List			
Product name	Shutter Door Magnetic Contact		
Model	EA-137A	EA-137B	
QTY	50pcs/ CTN		
Packing Specifications	37.5L * 30W * 29.5H (cm)		
Packing weight	14.14kg	15.5kg	

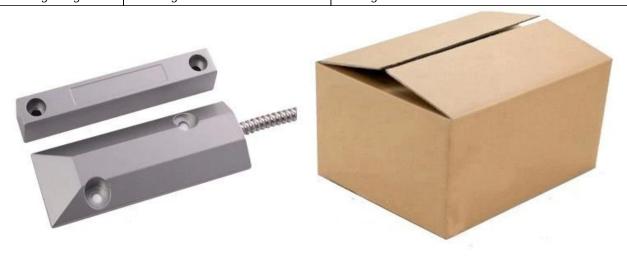



• Office SMQT













• Exhibitions SMQT

