

● Parameter

SMQT

Model	EB-138A	EB-138B	EB-138C
Dimensions	46 * 21 * 12 (mm)	47 * 17 * 7 (mm)	30 * 13 * 6 (mm)
Connection	Normally open / normally closed	Normally open / normally closed	Normally open / normally closed
Operating distance	50 ± 10 (mm)	50 ± 10 (mm)	50 ± 10 (mm)
Maximum pressure	≤100VDC	≤100VDC	≤100VDC
Working Power	≤10W	≤10W	≤10W
Housing Material	Zinc Alloy	Zinc Alloy	Zinc Alloy
Scope	Iron door or window	Iron door or window	Iron door or window
Load current	≤500mA	≤500mA	≤500mA
product weight	150g	100g	50g


● Introduction

SMQT

Zinc alloy material waterproof seal export models look pretty high suction force responsive
Metal body build

● Dimesion Picture

SMQT

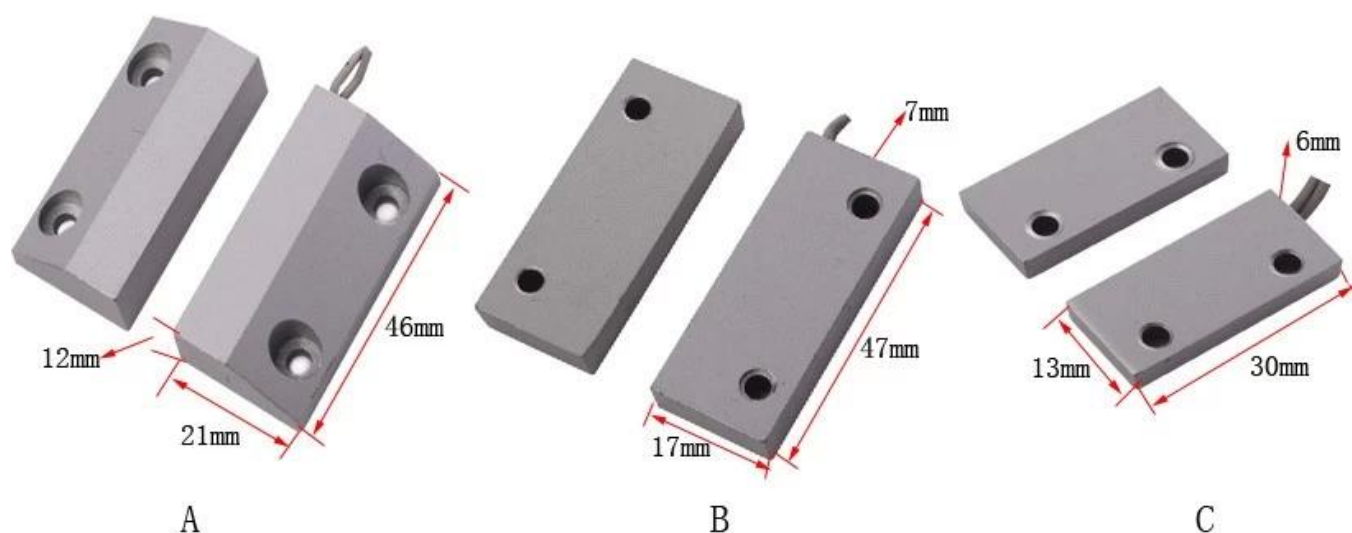

● Installations

SMQT



Metal Door Intallation Sample

When the window is closed, both parts of magnetic contact are intalled without gap between them. After succeed in arm, drill the screws.



● Features

SMQT

Wide Appilcation

Magnetic contact is totally waterproof, which is capable for different installation situations. Long working life, easy installation for metal door or window.




Aluminum Alloy Materials

Aluminum alloy materials are safe and stable. 300mm #22 cables are useful to install to metal door or window.



Waterproof Design

Magnetic contact is sealed of PC for the connection between magnetic and cable, which reduces power leak. Drill the hole for the crews. Easy to install.

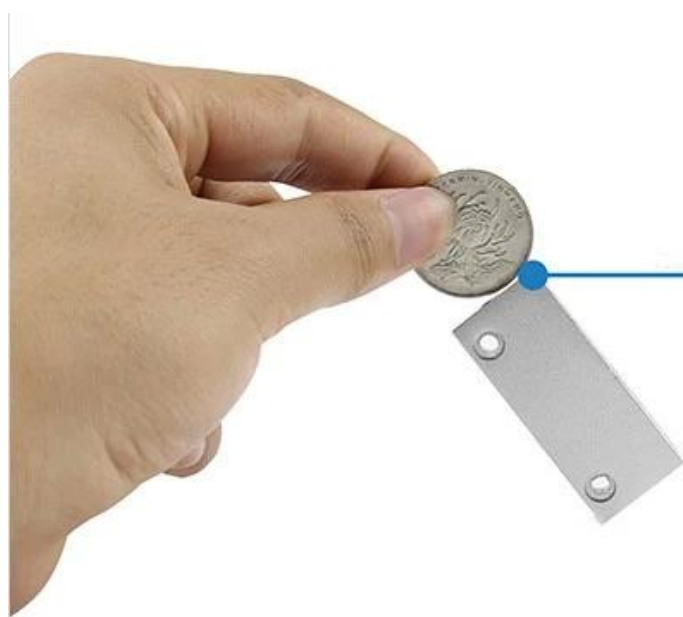

Strong Magnetic

Magnetic contact supports waterproof design. Strong magnetic, work stably.

● Packing list

SMQT

Model	EB-138A	EB-138B	EB-138C
Qty	50pairs / box	50pairs/ box	50pairs/ box
Package Size	32L * 22W * 12H (cm)	32L * 22W * 12H (cm)	32L * 22W * 12H (cm)
Gross Weight	8Kg	5.5Kg	3Kg