■ Parameter SMQT

Specification		
Product name	Embedded Concealed Doors Sensor Magnetic Contact	
Model	EB-141	
Dimensions	Φ10 * 25 (mm)	
Connection	Normally open / normally closed	
Operating distance	15-20 (mm)	
Maximum pressure	≤100VDC	
Load current	≤500mA	
Working Power	≤10W	
Housing Material	ABS	
Shell color	White / Brown (optional)	
Suitabe for	Wooden doors and windows / wooden doors	


Introduction
SMQT

ABS fire-retardant material.

Waterproof seal, beautiful appearance, high magnetic adsorption.

Embedded Magnetic switch consists of two parts and the magnet switch, switch section connected by reed switch via lead. Package from stereotypes; the magnet portion by the corresponding magnetic field strength magnets packaged in plastic or metal housing. When two separate or close to a certain distance, thereby causing breaking switch sensing changes in body position.

Embedded Menci alarm widely used in many areas of urban security, banking, telecommunications, power, justice, community, factories, companies, schools, homes, villas, warehouses and other doors and windows installation.

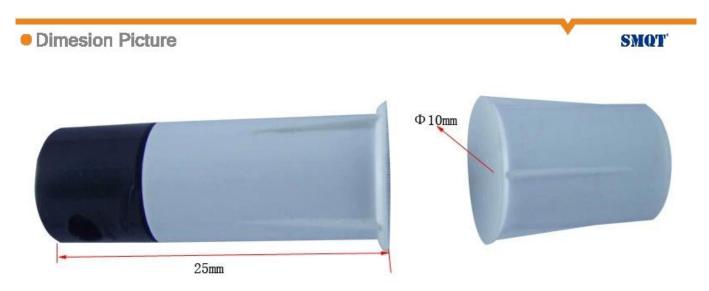


● Features SMQT





• Installations SMQT

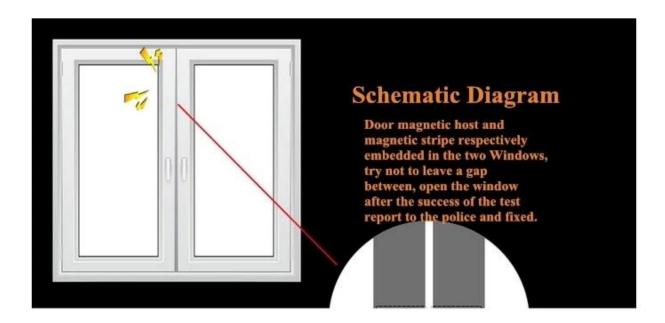

Packing list SMOT

Packaging List		
Product name	EB-141 Embedded Concealed Doors Sensor Magnetic Contact	
Qty	2000 / box	
Packing Specifications	37.5 * 29.5 * 20 (cm)	
Packing weight	20.94Kg	



• Office SMQT













• Exhibitions SMQT

