

• *Parameter*

SMQT

Product number	EA-22A	EA-22B
Standard Structure	Aluminum panels, metal buttons	Aluminum panels, metal buttons
Electrical Performance	Current maximum durability 3A36VDC	Current maximum durability 3A36VDC
Durability test	500,000 times aging tested	500,000 times aging tested
For Type	Applicable hollow frames and submerged electrical box	Applicable hollow frames and submerged electrical box
Temperature	-10 ~ + 55 °C	-10 ~ + 55 °C
Applicable humidity	0 to 95% (relative humidity)	0 to 95% (relative humidity)
Panel Processing	Aluminum panels sandblasted	Aluminum panels sandblasted

• *Introduction*

SMQT



Door lock release button with the material metal and stainless steel

push exit button for access control system.

• *Feature*

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• *Installation*

SMQT



Switch power supply

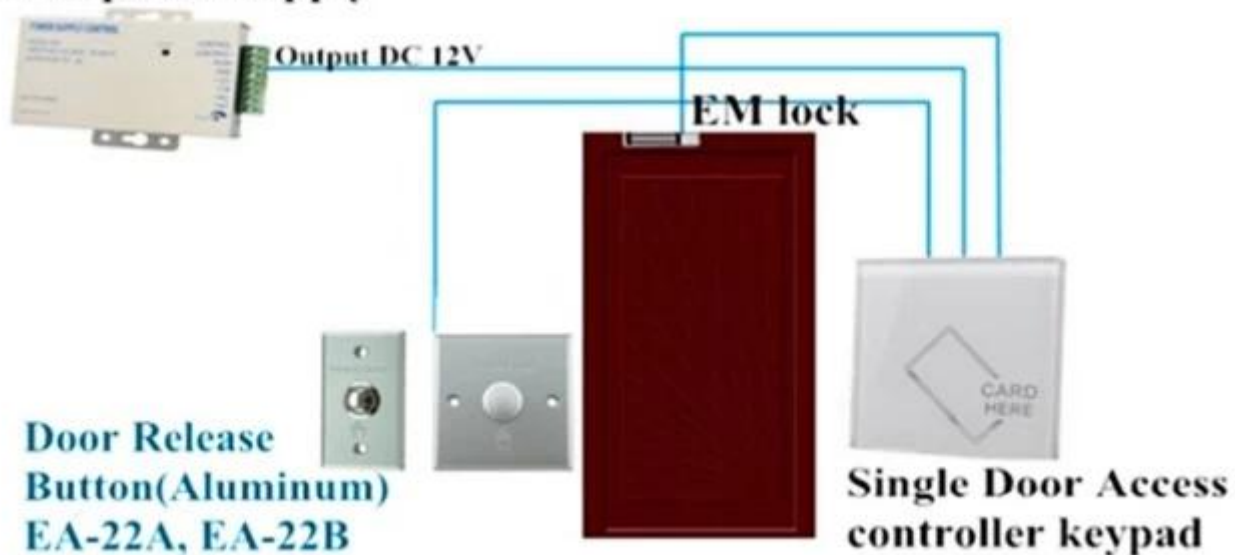

•Dimension

SMQT



EA-22A



EA-22B

• Packaging & shipping

SMQT®





• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

