Parameter

SMQT

Product number	EA-22A	EA-22B
Standard Structure	Aluminum panels, metal buttons	Aluminum panels, metal buttons
Electrical Performance	Current maximum durability 3A36VDC	Current maximum durability 3A36VDC
Durability test	500,000 times aging tested	500,000 times aging tested
For Type	Applicable hollow frames and submerged electrical box	Applicable hollow frames and submerged electrical box
Temperature	-10 ~ + 55 ℃	-10 ~ + 55 ℃
Applicable humidity	0 to 95% (relative humidity)	0 to 95% (relative humidity)
Panel Processing	Aluminum panels sandblasted	Aluminum panels sandblasted

Introduction

SMQT

Door lock release button with the material metal and stainless steel

push exit button for access control system.

•Feature

SMQT

EA-22A

EA-22B

EA-22A

EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button

500,000 times mechanical test

•Installation

SMQT

EA-22A

EA-22B

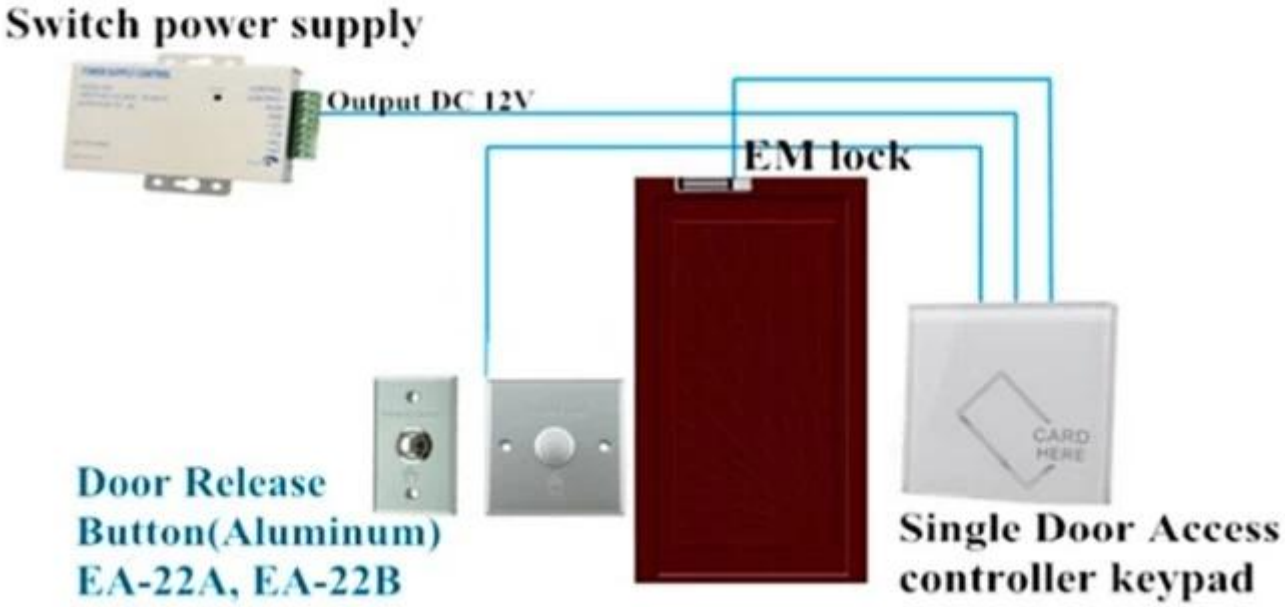

•*Dimension*

EA-22A

EA-22B

•*Packaging & shipping*

SMQT

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair