

# Fireproof ABS home smart automatic wired door switch sensor

## Product Description



| Parameter           |                                                             |
|---------------------|-------------------------------------------------------------|
| Product name        | Fireproof ABS home smart automatic wired door switch sensor |
| Model               | EB-135                                                      |
| Dimension           | Φ10 ×18.5(mm)                                               |
| Code mode           | NO/NC(optional)                                             |
| Gap                 | 20±5(mm)                                                    |
| Max voltage         | ≤100V DC                                                    |
| Max current         | ≤500mA                                                      |
| Max rating          | ≤10W                                                        |
| Color               | Brown/White(optional)                                       |
| Suit for            | wooden door or window                                       |
| Material            | Fireproof ABS housing                                       |
| Working temperature | -10 °C~50 °C                                                |
| Net weight          | 8g                                                          |

what features of our wired door switch sensor ?

**2 Color optional**



**White**

**Brown**

Fireproof ABS housing

Brown or White color optional

Suit for wooden doors or windows

Normal open or Normal close optional

2 years quality warranty,welcome OEM

## IN-KIND SHOOTING



Application

---

APPLICATION



## Door Magnetic Contact safe door happy life

(Notice: need match the home alarm system to)



### Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.




Notice:  
Gap < 2cm



### Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

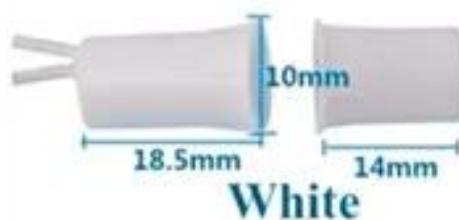

Show Cases

SHOW CASES

|                                                                                                                                                  |                                                                                                                                                  |                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div>   | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div>  | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div>   |
| <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> |
| <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> | <div>SMQT<sup>®</sup></div> <div></div> <div>CE RoHS FC</div> |

## Company Information

### OFFICE SHOW



### CUSTOMERS



### EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

## CERTIFICATION



## Our Services

## Payment & Transport



**1. Powerful R&D team can provide customized features and functions, referring to different**

**requirements from different customers.**

**2. Payment term: T/T, Western Union, and Paypal.**

**3. 24 hours after-sale service is provided with the professional technical support and training.**

**4. Our artist team can provide Neutral pictures for distributor's website promotion.**

**5. Optional shipping service: couriers (UPS, DHL, TNT, and Fedex), by sea, and by air.**

## FAQ

### FAQ

---

### **1. Can I have a sample order?**

Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acceptable.

### **2. What is the lead time?**

Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

### **3. Do you have any MOQ limit?**

EXW MOQ is 100pcs under blank box.

### **4. How do you ship the goods and how long does it take arrive?**

The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time

depends on the shipping service.

### **5. How will we proceed the order if I have logo to print?**

Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would

make sampling firstly from silk print factory and take picture for your second confirmation before

mass production.

### **6. Does alarm panel work with any sensor?**

The alarm system can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV1527 or our wireless sensors .