Home usage Wired Heat Detector security safety




| Home usage Wired Heat Detector security safety | | | |
|--|--|--|--|
| EB-118 | | | |
| 105Ø*50(mm) | | | |
| 9~12V DC | | | |
| 9~12 V DC | | | |
| Static current 10uA Alarming current 20~50mA | | | |
| 70°C(Standard) accept OEM | | | |
| 10%~90% | | | |
| 2.2~3.6m | | | |
| -25°C~65°C | | | |
| -25 C~05 C | | | |
| Adjustable | | | |
| | | | |

| Alarm indicator | Red LED Light(close if need) |
|--------------------|------------------------------|
| Alarm output | NC,28V DC,0.15A |
| Anti-tamper switch | NC,28V DC,0.15A |
| Operating humidity | 95% |
| Color | White |
| Weight | 0.1kg |

Product Features

What Features of our Heat detector?

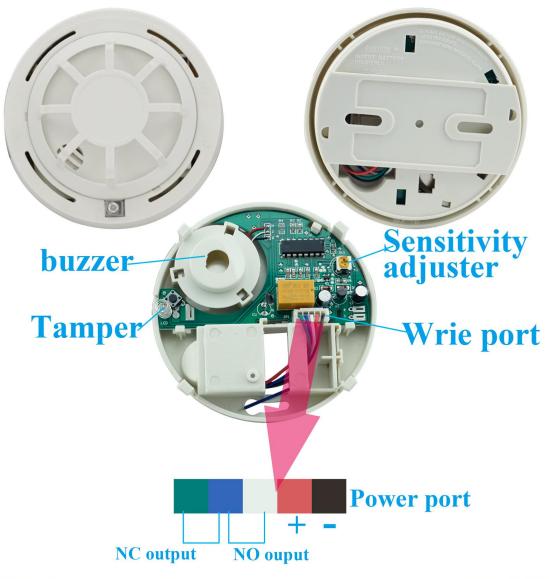



IN-KIND SHOOTING



SHOW CASE



















OFFICE SHOW













CUSTOMER














EXHIBITION



CERTIFICATE



HOW TO COOPERATION

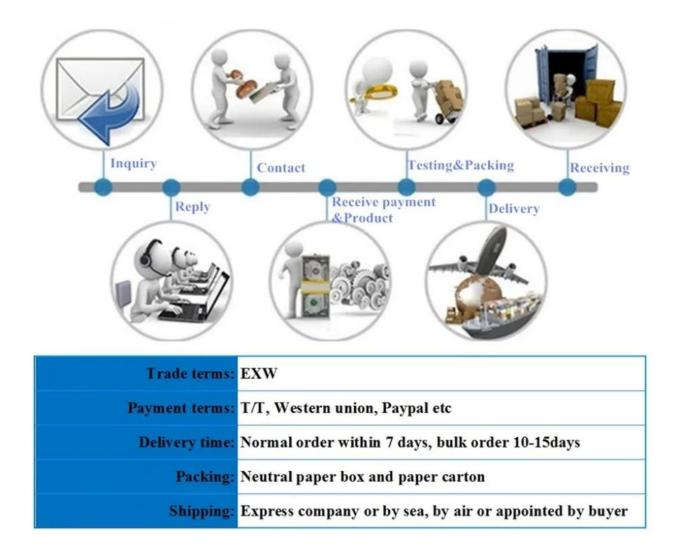

FAO

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.