

Product number	IP65 card reader outdoor,card system,id card reader
Operating Voltage	DC12 ± DC3V
Power consumption	<1W
Card Type	125KHZ ID
Reading distance	60mm
Communication range	150m
communication method	WG26 / 34
Transmission rate	1bit / ms
Dimensions	96L * 96W * 22H (mm)
Housing Material	PC
Operating temperature	-30 °C ~ + 65 °C

What Features of our card reader outdoor?



- 1. Special designs, beautiful energy-saving background light
- 2. Use imported PC material, impact resistance, heat resistance, strong rot resistance.
- 3. Using advanced FLASH storage technology, it can save the information for ten years even if the power is off even if the power is off .
- 4. With 100 sets of control time zones ,it can control when and how to open the door .( just set up in the software).





## **SHOW CASE**



#### **OFFICE SHOW**













# **CUSTOMER**














## **EXHIBITION**



#### **CERTIFICATE**



## **HOW TO COOPERATION**

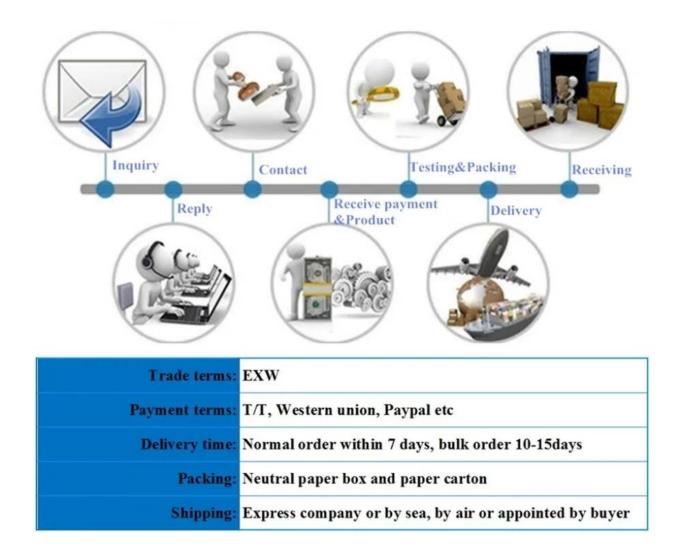

## **FAQ**

## Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

#### O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

### Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

## Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

#### Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

## **Q:** Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.