


Specification	
Name	Indoor barrier beam sensor,infrared switch,curtain beam infrared detector
Model	ABB series
Beams	2/4/6/8/10(optional)
Detecting distance	5m 10m 20m 30m 40m 60m(optional)
Detector height	37/72/125/167/209cm
Operating voltage	DC 12V-18V
Operating current	30-80mA
Feedback speed	less than 1.5ass
Relay contact	3A,AC120V/DC24V
Environment temperature	-35°C~+55°C
adjustment angle	180°±90°
Color	Black and Sliver
Material	PC resin

What Features of our beam sensor?

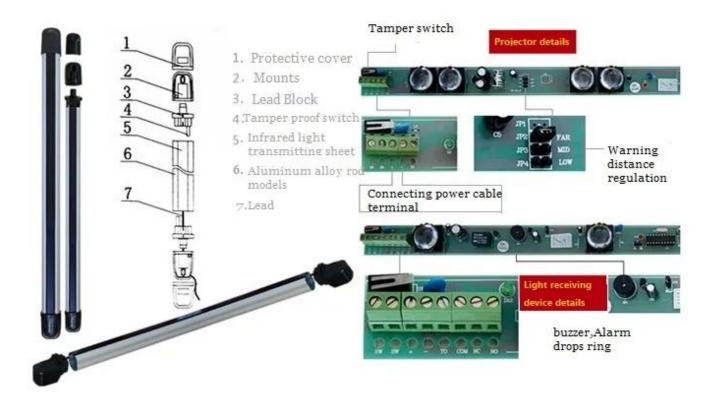

IN-KIND SHOOTING

PRODUCT PICTURE











APPLICATION



SHOW CASE







OFFICE SHOW













CUSTOMER














EXHIBITION



CERTIFICATE



HOW TO COOPERATION

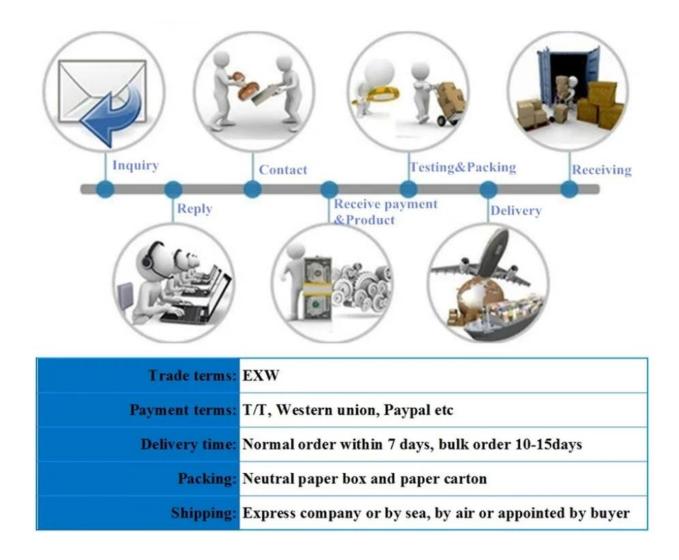

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.