# Wired metal magneict contact sensor NO/NC code mode optional 50±10(mm) gap distance Max voltage ≤100VDC, Max current≤500mA Alloy-zn material Suitable for metal door or window Grey color Weight: A:150g B:100g C:50g

SMOT°

Product Name:	Larger metal magnetic door sensor,metal door magnetic sensor,window contact
Dimension:	47×17×7(mm)
Gap:	50±10(mm)
MAX Current:	≤500mA
MAX Voltage:	≤100VDC
MAX Rating	≤10W
Code Mode:	NC
Material:	alloy-zn
Colour:	Gray
Suit for:	metal door or window
Weight:	100g

What Features of our door contact?



# Wired metal magnetic contact sensor NO/NC code mode optional 50±10 gap distance Max voltage:≤100V DC, Max current≤500mA Max rating≤10W

Alloy-Zn material Suitable for metal door or window

Weight: A:150g B:100g C:50g Welcome OEM, 2 years quality warranty

# **IN-KIND SHOOTING**



# **SHOW CASE**



# **OFFICE SHOW**













# **CUSTOMER**














# **EXHIBITION**



#### **CERTIFICATE**



### **HOW TO COOPERATION**

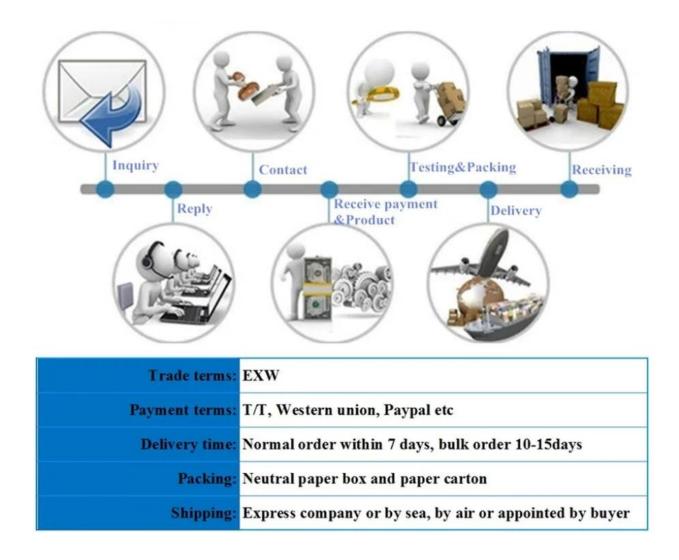

## **FAQ**

#### Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

#### O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

#### Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

#### Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

#### Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

#### **Q:** Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.