

What specifications of our EB-117A?

Latest item 9v DC standalone smoke detector for security alarm system	
Sound and Light alarm	
Operating voltage:	DC9V/AC220V
Static current	≤12uA
Alarm current	≤15mA
Enviroment temperature	-10°C~+60°C
Humidity	≤90%
Audio alarm	85dB
Battery	9v batery back-up for at least 1 year
Alarm Reset	Automatic when smoke clears
Protection area	6m high, 60m ²
DC power	Audio alarm and rapidly
Indicators LEDS	Intermittent Red LED
Local alarm	Flashing Red LED
Weight	185g

What features of our EB-117 photoelectric smoke detector?



Standalone smoke detector for fire alarm system


Alarm mode: LED indication network output

85dB sound pressure, 100m transmitting distance

1 year battery working life

Welcome OEM, 2 years warranty

IN-KIND SHOOTING

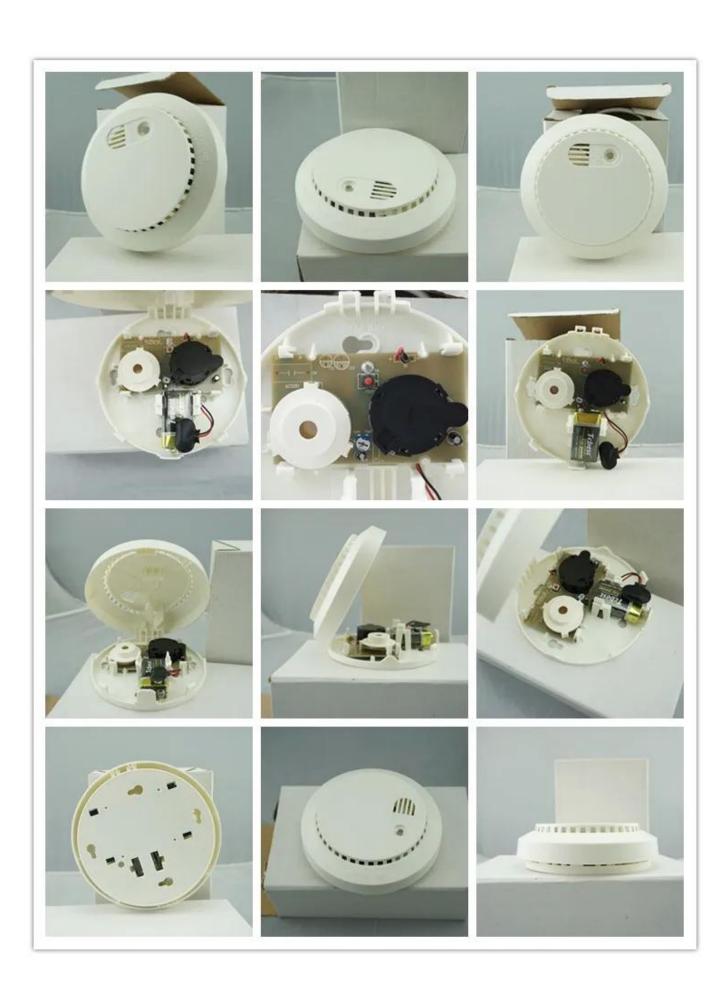


APPLICATION

FRONT



BACK

SIDE

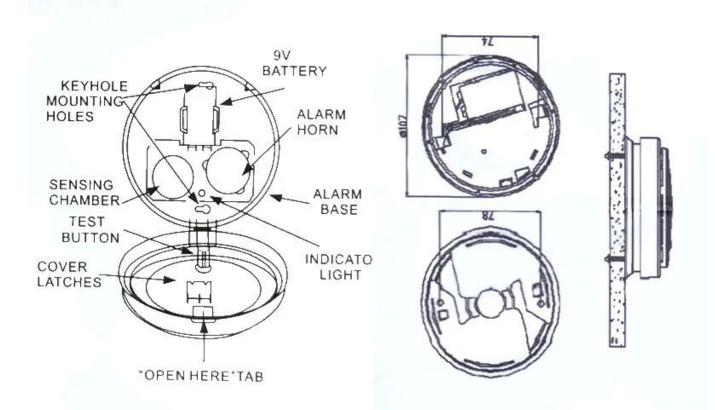

Suitable for home,office,factory,hotel,school,bank..etc.



SIMILAR PRODUCT



OFFICE SHOW







Bai





CUSTOMER





EXHIBITION



CERTIFICATION



PACKING & SHIPPING & PAYMENT



FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

Q: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The deli very time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, w e would make sampling firstly from silk print factory and take picture for your second confirm ation before mass production.