

Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed


Twisted-pair cables as transmission medium

With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT

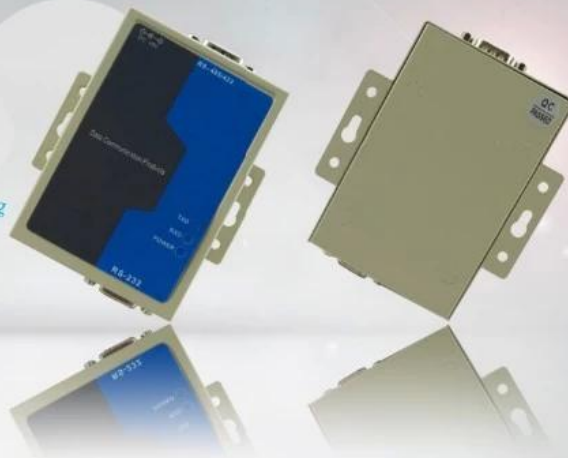

• Parameter

SMQT

Product Size	90L * 65W * 25.5H (mm)
External power supply	DC9V
Interface Features	Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard
Electrical Interface	RS-232C interface DB9 female connector port, RS-422 / RS-485 Interface DB9 female connector and is equipped with six terminals
Transmission rate	300-115.2KBPS
Signal indication	Three signal lights TXD RXD POWER
Transmission medium	Shielded twisted pair wire
Protection class	RS-232 interface $\pm 15\text{KVESD}$ protection, RS-422 / RS-485 interface to 600W per line lightning surge protection
Isolation	3500VRMS
Isolation Voltage	500VDC continuous
Environment	5% to 95%
Operating temperature	0 °C ~ 50 °C

• Introduction

SMQT

The door access control converter is 2 wire rs485 rs422 ethernet converter and dc converter for home.



• Feature

SMQT



EA-05

Converter RS232 to RS485

**Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard**

Electrical Interface:

**RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector**

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

● **Installation**

SMQT

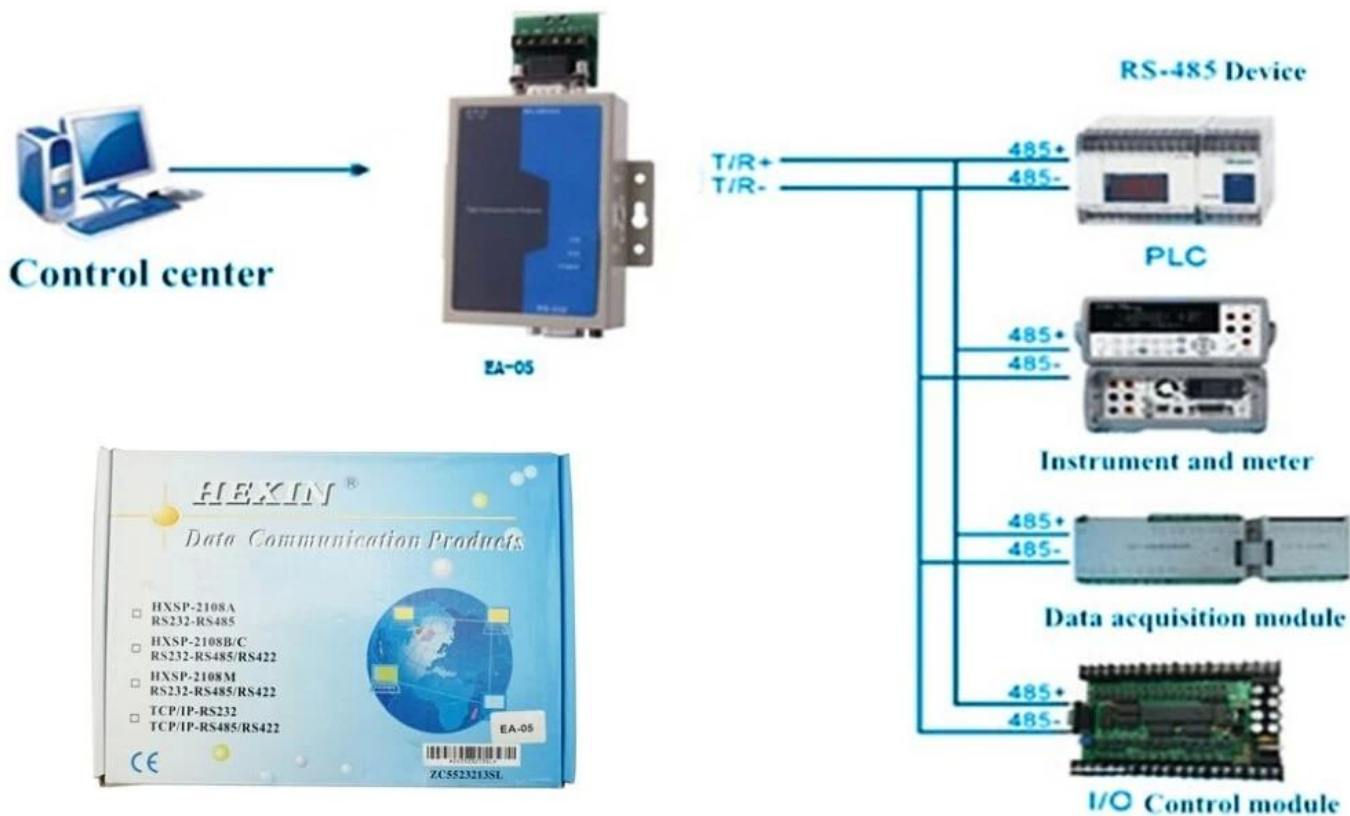

• Show case

SMQT



• Packaging & shipping

SMQT



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

