

---

## ● Parameter

SMQT

Dimensions	64L * 19W * 13H (mm)
Connection	Normally open / normally closed
Operating distance	20 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material shape
Colour	Brown / White
Scope	Non-ferrous door or window
product weight	24g

---

## ● Introduction

SMQT

Housing material: ABS material

Color: white, brown optional

Features: intermediate stages, regardless of the installation around

Material connection: terminal connection

Output: When the magnet close to the switch, reed switch contact closure signal line connected.

As the door is opened, the magnet away from the switch, reed contact is open, the interrupt signal line, called ---- "break alarm."

The wired magnetic contact sensor is the door contact switch for door alarm.you can set with the window or door work with the alarm system or access control system.

---


## ● Dimesion Picture

SMQT



● Installations

SMQT

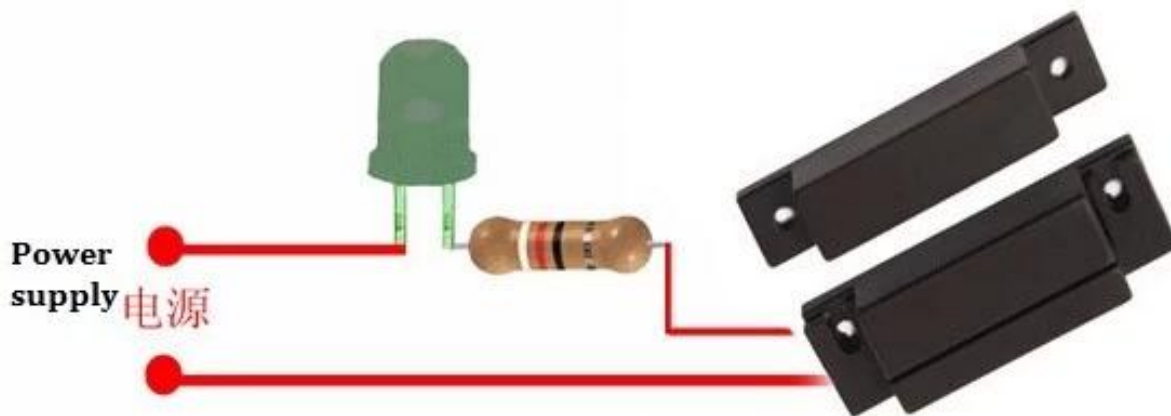

● Packing list

SMQT



Qty	800 / box
Packing Specifications	40L * 30W * 20H (cm)
Packing weight	19.68Kg

## ● Office

SMQT



## ● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair