
Metal door magnetic contact for access control and alarm system

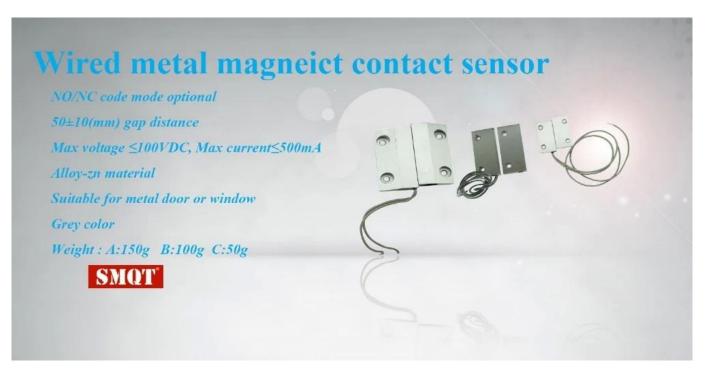

Product name	Metal door magnetic contact for access control and alarm system
Model	EB-138
Dimension	(A)46×21×12(mm) (B)47×17×7(mm) (C)30×13×6(mm)
Code mode	NO/NC(optional)
Gap	50±10(mm)
Max voltage	≤100V DC
Max current	≤500mA
Max rating	≤10W
Color	Grey
Suit for	Metal door or window
Material	alloy-zn
Net weight	A:150g
	B:100g C:50g

What is the product picture of our Magnetic Contact?

The electronic door sensor like the magnetic lock button magnetic contact reed switch sensor for door control system electric door switches.

PRODUCT PICTURE



What features of our Magnetic Contact?

•Feature

SMQT

PRODUCT FEATURE



<u>Wired metal magnetic contact sensor</u> <u>NO/NC code mode optional</u> <u>50±10 gap distance</u> <u>Max voltage:<100V DC, Max current<500mA</u> <u>Max rating<10W</u> <u>Alloy-Zn material</u> <u>Suitable for metal door or window</u> <u>Weight: A:150g B:100g C:50g</u> <u>Welcome OEM, 2 years quality warranty</u>

SHOW CASE



Company Information

OFFICE SHOW











CUSTOMER




EXHIBITION



CERTIFICATE



HOW TO COOPERATION

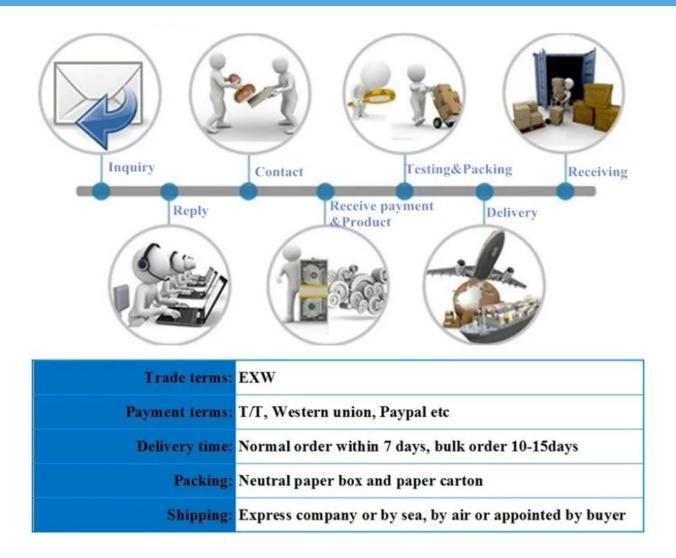

FAO

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

Q: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A: The sample will be sent to you by optional shipping service (couriers, air, and sea). The deli very time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, w e would make sampling firstly from silk print factory and take picture for your second confirm ation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.