

Specification	
Model	ABE
Detecting distance	Indoor :150m 300m 450m 600m 750m Outdoor:50m 100m 150m 200m 250m(optional)
Operating voltage	13.8~24VDC 11~28VAC
Operating current	40-65mA
Indication speed	50~700m/sec
Anti-demolition output	NC
Environment temperature	-20°C~+50°C
Alarm output	NO/NC
Level adjustment	180°±90°
Vertocal adjustment	±10°
Color	Black
Material	PC resin

# What Features of our beam sensor ABE?



- 1.Waterproof 3 beams infrared perimeter detector
- 2. 100m,150m,200m,250m outdoor decting distance optional
- 3.Anti-lightning circuit designed
- 4. High-power infrared receiver more stable
- 5.2 years warranty , welcome OEM

# **IN-KIND SHOOTING**




















## **APPLICATION**

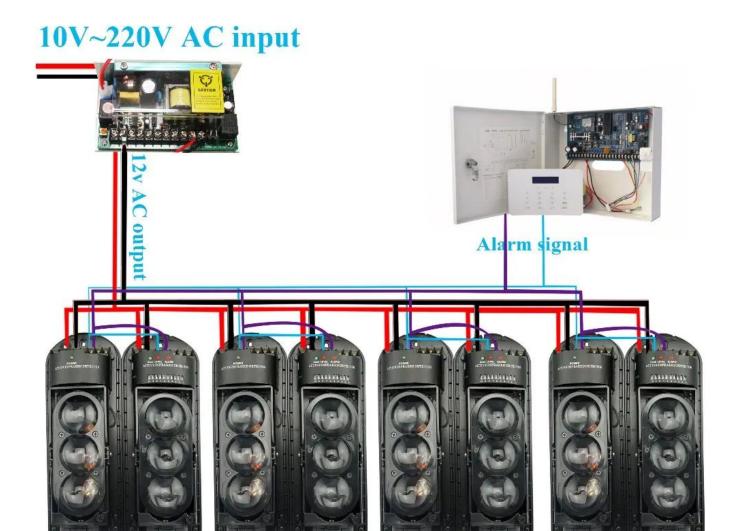


3 beams perimeter detecor ABE

Transmitter Receiver

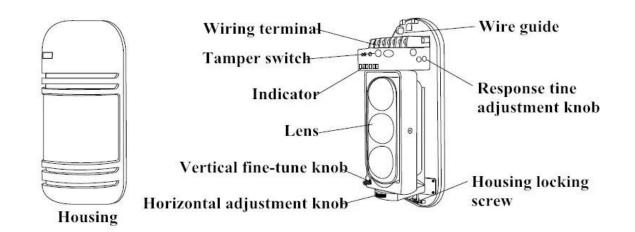





# **SHOW CASE**



# **OFFICE SHOW**













## **CUSTOMER**













## **EXHIBITION**



# **CERTIFICATE**



### **HOW TO COOPERATION**



# PACKAGING & SHIPPING

Detection+Packing+Sealing+Fnishing+International Express



















# **FAQ**

**Q:Can I have a sample order?**A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc

eptable.

#### Q: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

### Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

### Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

### Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

#### Q: Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.