



Model	EB-181
Dimention	89×52.5×38.5(mm)
Operating voltage	12VDC
Consumtion current	18mA
Detecting distance	12m
Alarm output	NO/NC
Installation height	about 2.2m
LED	ON/OFF(optional)
Detecting angel	110°
Installation mode	wall mounted
Material	fireproof ABS housing
Enviroment temp	-10°C~+50°C
Weight	92g

**what features of our EB-181?**



1. Wall-mounted PIR motion sensor for wired alarm system

2. 12m detecting distance

3. NO/NC alarm output



4.on/off LED light is optional

5. Welcome to 2years warrenty and OEM


**IN-KIND SHOOTING**



## HOW TO USE IT

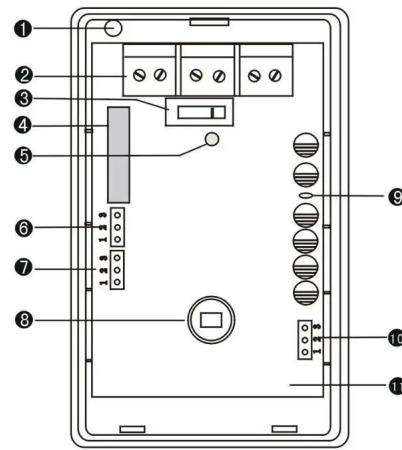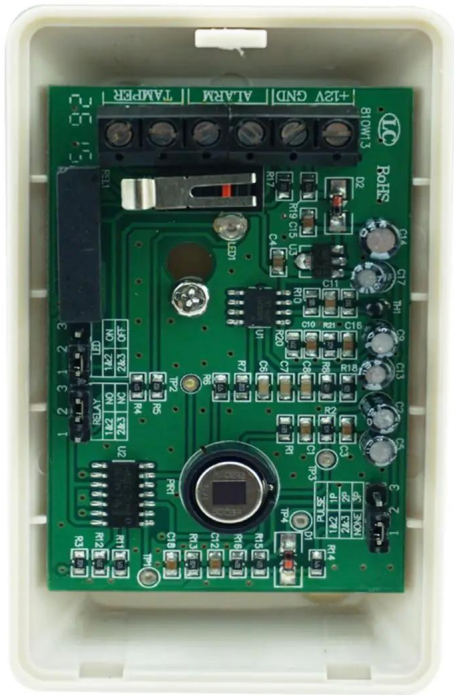

- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB

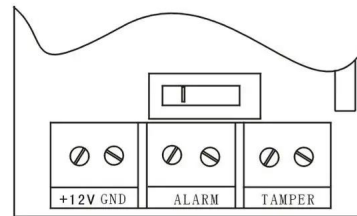

- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT



## RELATED ITEMS

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

**SMQT**® 深圳市铭汗科技有限公司  
SHENZHEN MINGQIAN TECHNOLOGY CO.,LTD



<https://eis.en.alibaba.com>

## PACKING & SHIPPING



## OFFICE SHOW



## CUSTOMER



## EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

## CERTIFICATION

