

Product name	Round magnetic door access control system,sliding door sensor price		
Model	EB-135		
Dimension	24×41×6(mm)		
Code mode	NO/NC(optional)		
Gap	20±5(mm)		
Max voltage	≤100V DC		
Max current	≤500mA		
Max rating	≤10W		
Color	Brown/White(optional)		
Suit for	wooden door or window		
Material	Fireproof ABS housing		
Working temperature	-10 °C~50 °C		
Net weight	8g		

What Features of our magnetic contact?





In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.




Notice: Gap<2cm

Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming. Then to fixed.

2 Color optional

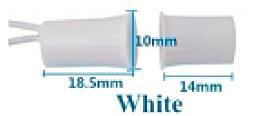



Brown

IN-KIND SHOOTING



SHOW CASE

SIMILAR PRODUCT















CUSTOMER














EXHIBITION



CERTIFICATE



HOW TO COOPERATION

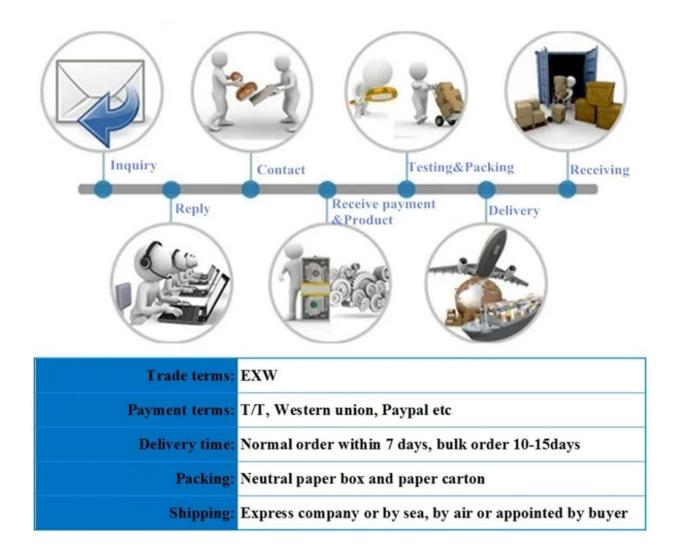

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.