

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wiegth: A:210g B:280g C:290g

SMQT®



• Parameter

SMQT®

Parameter	
Product name	Shutter door magnetic contact sensor
Model	EB-137
Dimension	106×38×10(mm)
Code mode	NO/NC(optional)
Gap	60±10(mm)
Max voltage	≤100V DC Mode C: 12VDC
Max current	≤500mA
Max rating	≤10W
Color	Grey
Suit for	shutter door
Material	A.alloy-zn, B.alloy-Al & alloy-zn C:wireless
Net weight	A:0.21Kg B:0.28Kg C:0.29Kg
Wireless frequency	433Mhz(1527chip code)
Wirless transmission distance	<100m

• In-kind shooting

SMQT®



• Feature

SMQT


EB-137A



EB-137B



EB-137C

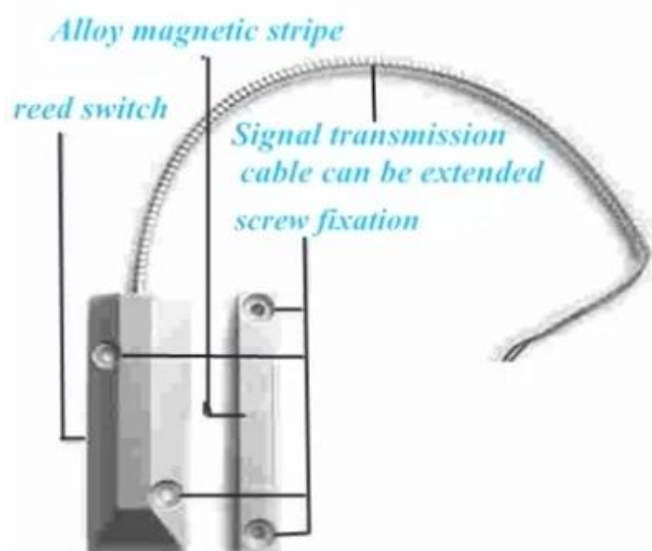

• *Packaging & shipping*

SMQT

Packaging list	
Product name	
Qty	50 pcs per carton
Carton size	38*30*30(cm)
Weight	10~17kg



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

