
Standalone photoelectric cigarette smoke detector conformed EN14604 standard



WHAT DOES EB-117S LOOK LIKE ?



HOW ABOUT EB-117S STANDARD PACKAGE?

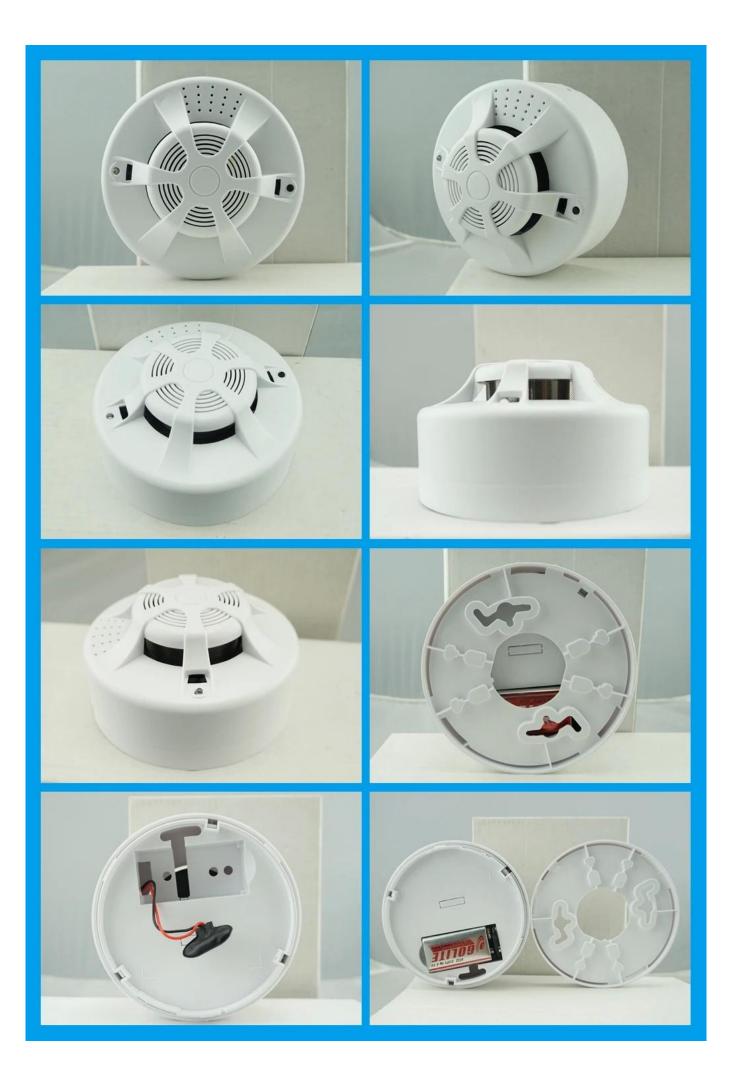

EB-117S MAIN PARAMETER

StandardModel number:EB-117SPower supply:DC 9 battery(6F22)Battery life time:>= 1 yearSize:106 diameter*56(mm)Feature:Dust-proof, Insect-proof, Anti-visible lightDetecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:White		
Power supply:DC 9 battery(6F22)Battery life time:>= 1 yearSize:106 diameter*56(mm)Feature:Dust-proof, Insect-proof, Anti-visible lightDetecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Product Name:	
Battery life time:>= 1 yearSize:106 diameter*56(mm)Feature:Dust-proof, Insect-proof, Anti-visible lightDetecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Model number:	EB-117S
Size:106 diameter*56(mm)Feature:Dust-proof, Insect-proof, Anti-visible lightDetecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Power supply:	DC 9 battery(6F22)
Feature:Dust-proof, Insect-proof, Anti-visible lightDetecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Battery life time:	>= 1 year
Detecting area:40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Size:	106 diameter*56(mm)
Detecting area:meters(less than 6m intallation height)Alarm indicationRed LED light flash & alarm sound promptSuitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Feature:	Dust-proof, Insect-proof, Anti-visible light
Suitable for:Fire alarmInstallation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Detecting area:	40 square meters(at 6~12m installation height); 20 square meters(less than 6m intallation height)
Installation way:Ceiling mountedWorking temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Alarm indication	Red LED light flash & alarm sound prompt
Working temperature:-10 Degrees Celsius~ +50 Degrees CelsiusWorking humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Suitable for:	Fire alarm
Working humidity:0~95%RH(no condensation)Weight:0.19kgLED:1 LED lightMaterial:ABS housing + PCB boardHousing color:WhiteWarranty:2 years warranty	Installation way:	Ceiling mounted
Weight:0.19kgLED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Working temperature:	-10 Degrees Celsius~ +50 Degrees Celsius
LED:1 LED lightMaterial:ABS housing+ PCB boardHousing color:WhiteWarranty:2 years warranty	Working humidity:	$0 \sim 95\%$ RH(no condensation)
Material:ABS housing + PCB boardHousing color:WhiteWarranty:2 years warranty	Weight:	0.19kg
Housing color:WhiteWarranty:2 years warranty	LED:	1 LED light
Warranty: 2 years warranty	Material:	ABS housing+ PCB board
	Housing color:	White
OEM: Welcome OEM		
	Warranty:	2 years warranty

WHAT FEATURES EB-117S HAVE?



1.Standalone cigarette smoke & fire smoke photoelectric detector

2.Working power 9V 6F22 battery(Life time >1 year)

3.Standby current <=15uA

4.Alarm current:<=56mA

5.Light & sound alarm(85 dB/m alarm sound)

6.Dust-proof, Insect-proof, Anti-visible light

7.Suitable for home, office , bank, hotel, library etc

8.Conformed EN14604 standard

9.2 years warranty , welcome OEM


HOW DOES EB-117S WORKING?



PCB Board



Detection zone

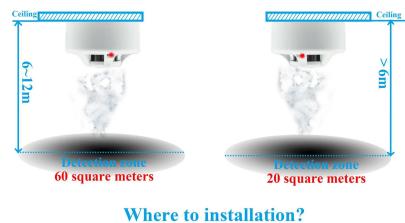



HOW ABOUT OTHER CHOICE?



Standalone photoelectric cigarette smoke detector conformed EN14604 standard Standalone photoelectric cigarette smoke detector conformed EN14604 standard Standalone photoelectric cigarette smoke detector conformed EN14604 standard