




Specification	
Product name:	Standalone smoke detector,wireless smoke sensor,alarm smoke
Size:	Ø106mm*59mm
Working Voltage:	9V 6F22 battery
Standby Current:	≤15uA
Alarm Current:	≤56mA
Battery Working Life:	Less than 1 year
Power Indicator:	Red LED
Alarm Indicator:	Red LED flash blink
Sound Pressure:	85dB/m
Working Temperature:	-10°C~50°C
Working Humidity:	≤95%RH
Transmitting Distance:	<100m (open area)
Execute criterion:	EN14604
Detecting area:	40 square meters when installation height between 6 to 12 meters. 20 square meters when installation height within 6 meters.

What Features of our smoke detector?

Standalone Gas detector

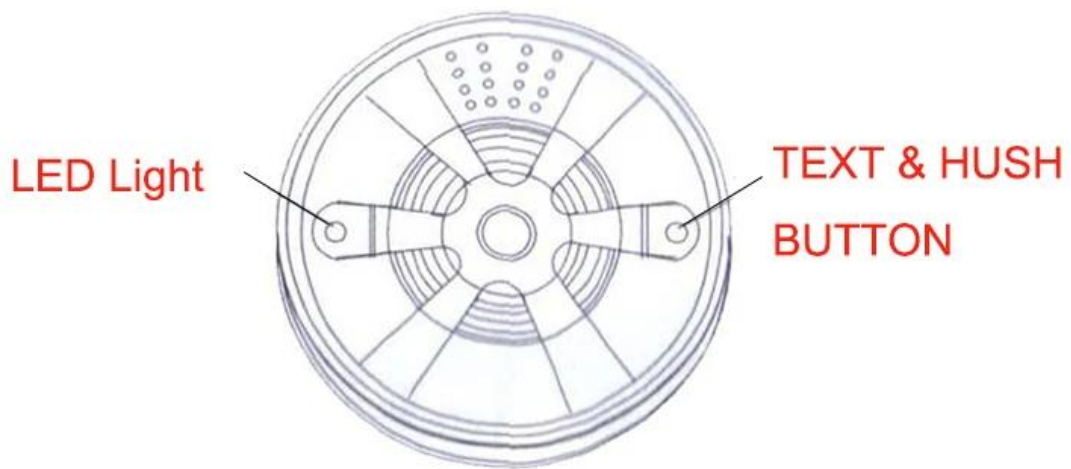

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

IN-KIND SHOOTING



SHOW CASE



OFFICE SHOW



CUSTOMER



EXHIBITION



CERTIFICATE



HOW TO COOPERATION



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer