Wiegand 26 SM7 Secret Algorithm 13.56MHz CPU card reader With Triple Recognition Fuction

Specification	
Name:	Wiegand 26 SM7 Secret Algorithm 13.56MHz CPU card reader With Triple Recognition Fuction
Dimensions:	96mm*96mm*22mm
Working Voltage:	9VDC-16VDC
Working Current:	≤ 120mA
Card Frequency:	13.56MHz
Response Time:	<0.1s (reading cards)
Communication Interface:	Wiegand26
Reading Distance:	3.5cm-5.5cm
Transmission Distance:	< 100 meters
Card Operation:	Read the card serial number or the user-defined card number
Protection:	Power reverse protection, data wire voltage protection, ± 15v
Working Environment:	0℃ ~ 60℃
Storage Temperature:	-20℃ ~ 70℃

What's the features of our Wiegand 13.56MHz CPU Card Reader?

- Support CPU SHC1112 card
- Support the ISO14443a protocol
- Card number and key can be user-defined
- Fully sealed design epoxy seal and waterproof type
- Wiegand 26 communication interface,26-122 bit output

IN-KIND SHOOTING





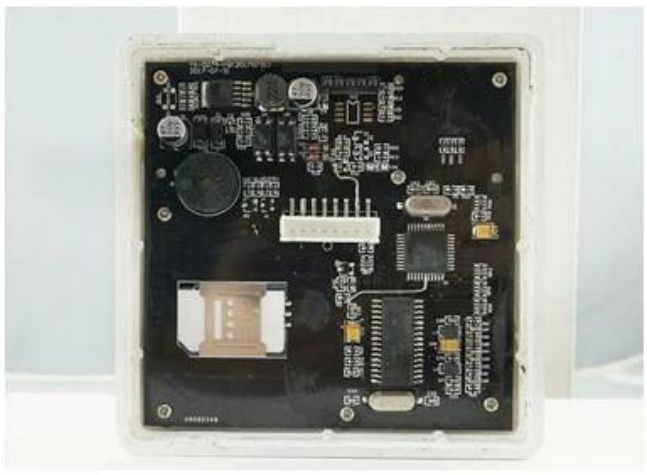

APPLICATION

CPU Card Reader

GND	9-16V DC	D0	D1	Buzzer	LED	RS232-TX	RS232-RX

Can work with different access control accessories :

Power Supply

EM Lock

Bluetooth Door Button

Dual Doors Access Control

SHOW CASES

OFFICE SHOW





CUSTOMERS

EXHIBITION

CERTIFICATION

HOW TO COOPERATE

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acceptable.

Q:What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days.

Q:What is your MOQ?

A:No MOQ limit.The more quantity the more discounts.

Q:How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea),or appointed by buyer,7-15 days.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.