

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optional

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT

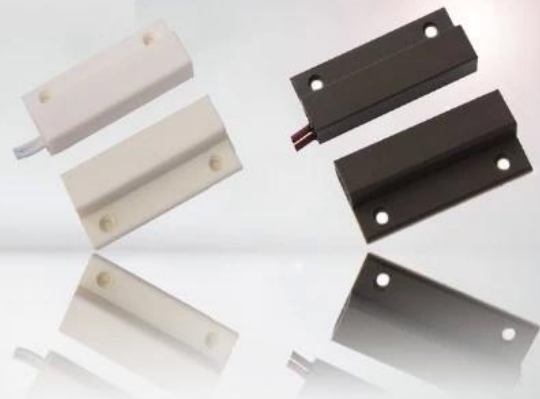

• Parameter

SMQT


| | |
|--------------------|------------------------------|
| Dimensions | 41L * 34W * 6.5H (mm) |
| Connection | NC / NO |
| Operating distance | 20 ± 5 (mm) |
| Maximum durability | ≤100VDC |
| Load current | ≤500mA |
| Working Power | ≤10W |
| Housing Material | ABS fireproof material shape |
| Colour | Brown / White |
| Scope | Non-ferrous door or window |
| product weight | 14g |

• Introduction

SMQT

The electronic door magnetic sensor switch is the magnetic detector switch and magnetic window contact switch 12v for access control system and alarm system.

PRODUCT PICTURE

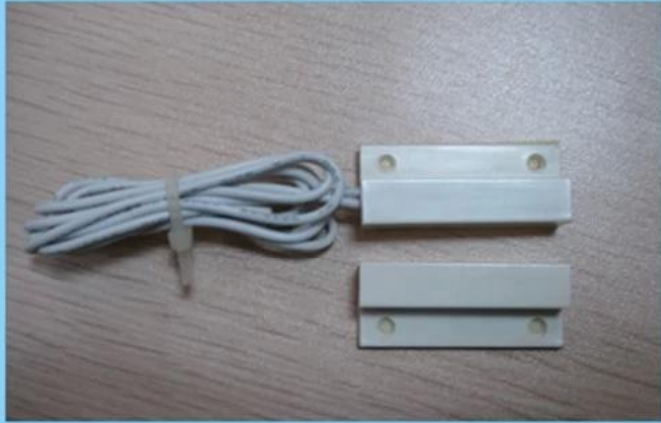

PRODUCT FEATURE



EB-132

Dimension:34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage≤100VDC,MAX current≤500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty,welcoem OEM



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....