Parameter
SMQT


Dimensions	41L * 34W * 6.5H (mm)
Connection	NC / NO
Operating distance	$20 \pm 5 \text{ (mm)}$
Maximum durability	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material shape
Colour	Brown / White
Scope	Non-ferrous door or window
product weight	14g


Introduction
SMOT

The magnetic contact sensor with wired and wireless mode. This model is wired magnetic door contact switch used in alarm security. Back of adhesive tape to provide easily installed in the door or window. Ideal security office, home, shops, entrance. When someone illegally open door or window it immediately send an alarm signal, the control panel receives the alarm signal immediately, the 120-decibel alarm sound.

The Magnetic contact switch with wired and wireless. The wired magnetic door alarm system.



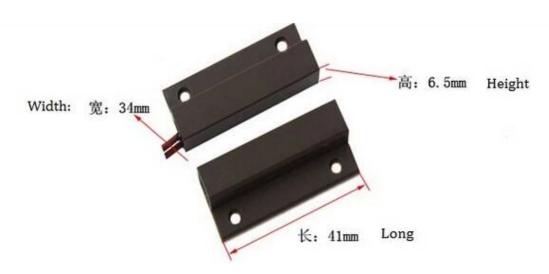

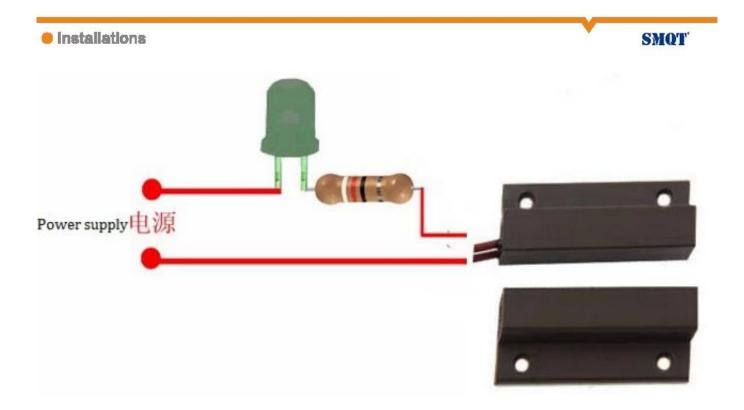



Qty	1200 / box
Packing Specifications	37.5L * 30W * 29.5 (cm)
Packing weight	16.38Kg

Office

SMQT













• Exhibitions SMQT

