

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT®




• Parameter

SMQT®

Parameter	
Product name	Wired door magnetic sensor
Model	EB-131
Dimension	64×19×13(mm)
Code mode	NO/NC(optional)
Gap	20±5(mm)
Max voltage	≤100V DC
Max current	≤500mA
Max rating	≤10W
Color	Brown/White(optional)
Suit for	wooden door or window
Material	Fireproof ABS housing
Working temperature	-10 °C~50 °C
Net weight	24g

• In-kind shooting

SMQT®

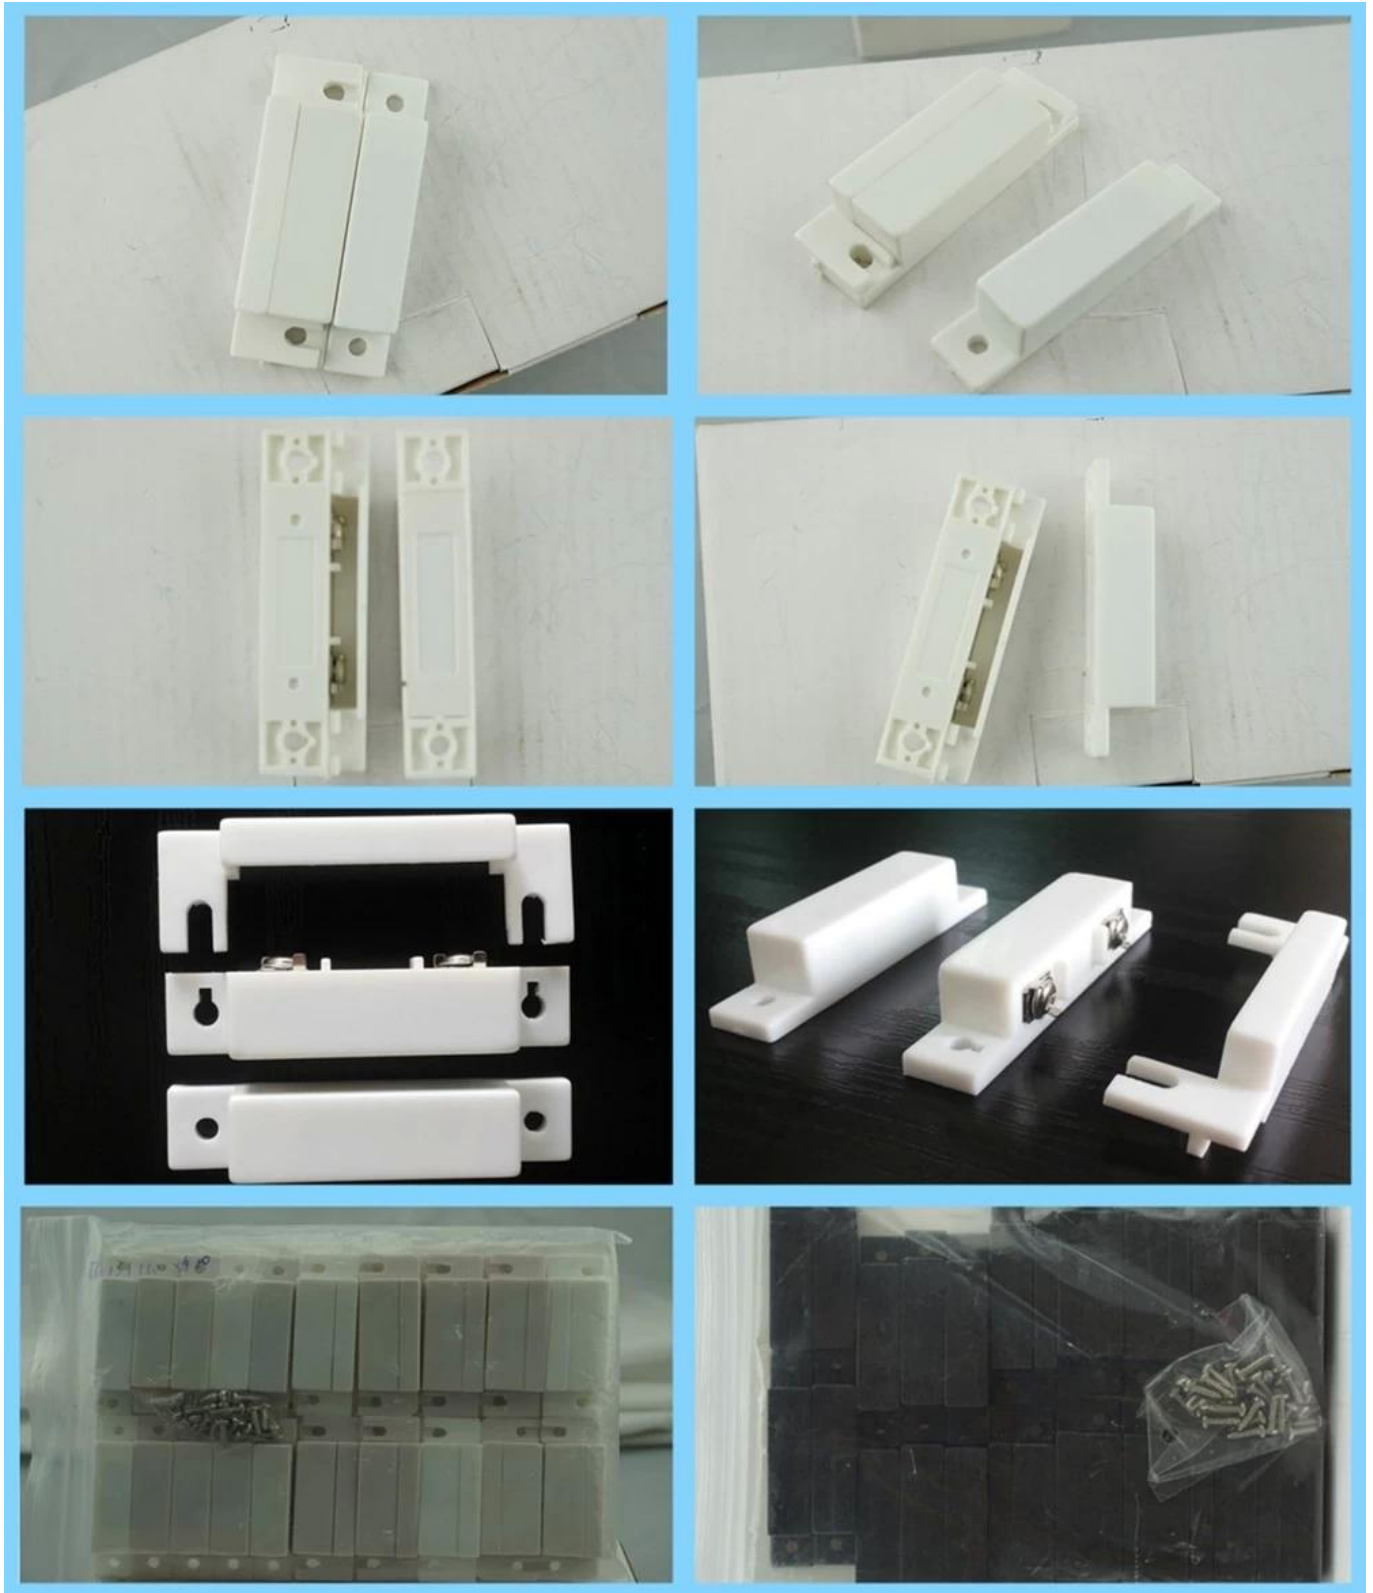

• *Feature*

SMQT



White



Brown

2 Color optional

Dimension:64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage≤110VDC,MAX current≤500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight:24g

2 years quality warranty, welcome OEM

● ***Packaging & shipping***

SMQT

Packaging list	
Product name	EB-131 Wired door magnetic sensor
Qty	800 pcs per carton
Carton size	37*30*29(cm)

Weight	20kg
--------	------



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

