


# Wireless anti-pet passive infrared detector for Alarm Home Security System

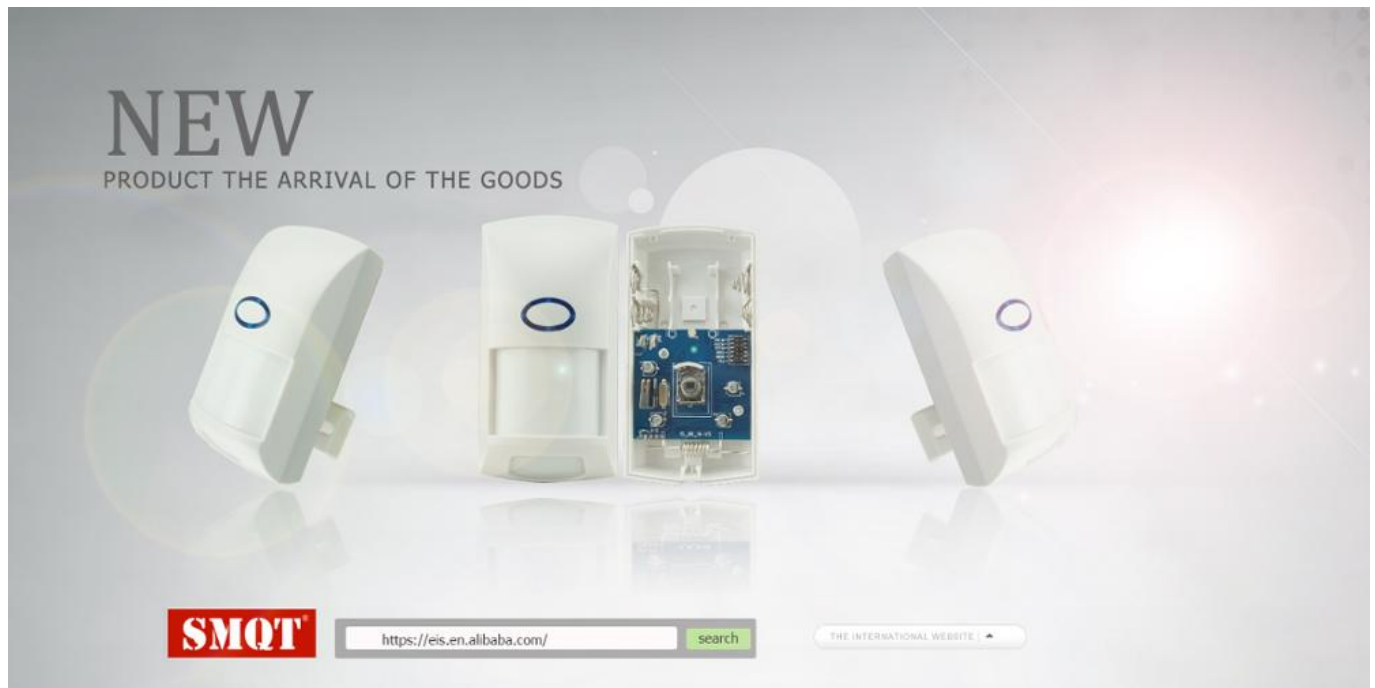

Parameter	
Product name	SMQT Wireless anti-pet passive infrared detector for Alarm Home Security System
Model	EB-192
Size	120*62*46(mm)
Working voltage	3V DC (2 AA alkaline battery)
Standby current	≤10uA
Alarm current	≤11mA
Detecting angle	110°
Working temperature	-20°C~50°C
Detecting area	Max 12*12(m)
Install Height	2.2m
Wireless frequency	433Mhz/868Mhz(1527)(optional)
Wireless transmission distance	Max 100m(in open air)
Alarm indicator	Red LED Light
Operating humidity	95%
Storage temperature	-10°C~60°C
Color	White
Weight	0.15kg

## Features

EB-192 is a wireless passive infrared detector with adoption of import ultra low power consumption microprocessor, with random dynamic time division and energy accumulation logic processing technology, with patented accurate columnar Finel lens,dual induction, adjustable pulse count, matching advanced patented software technology that can overcome wrong alarm and missing alarm from traditional detectors. It also has save battery mode making battery using time up to over 2 years.

**What features of SMQT Wireless anti-pet passive infrared detector for Alarm Home Security System EB-192?**



1. Wireless passive anti-pet infrared detector

2. Operation voltage DC 3V(2 AA battery)

3. Wireless frequency (1527 code chip) 433Mhz/868Mhz optional


4. 12m detecting distance

5. Wireless transmission distance 100m(in open air)

6. Pet immunity < 20kg

7. 2 years warranty , welcome OEM

**WHAT IS THE EB-192 LOOK LIKE?**

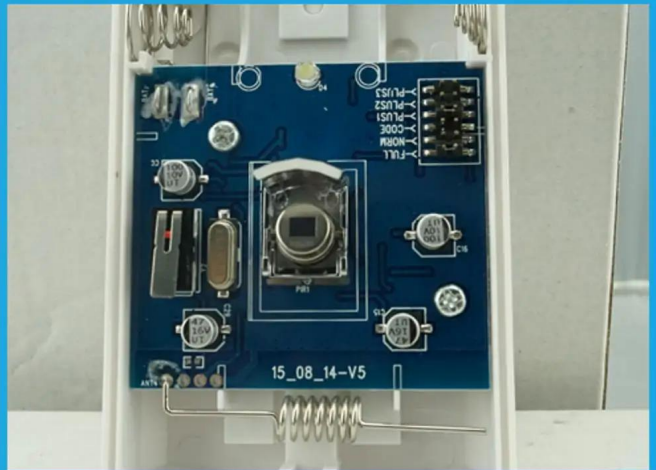

## **EB-192's STANDARD PACKAGE**



## **HOW TO USE IT?**













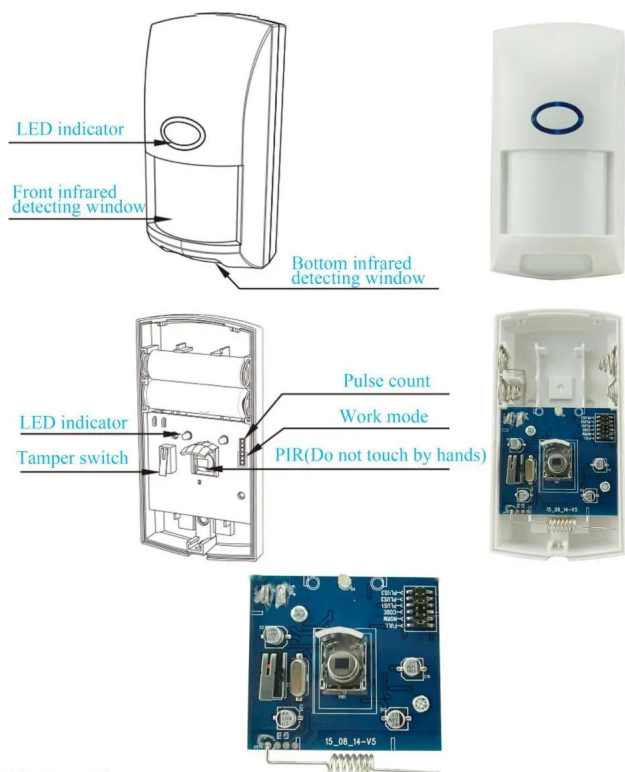


## Detecting area:

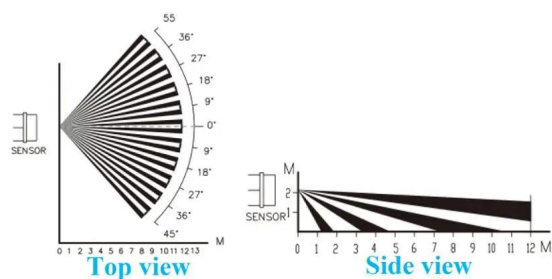


## Installation:

### 1.About pet immune:



The top part of detection area is non pet-immunity area



Never face the detector to the place that pets can climb up directly




Pet immunity:<20Kg pets



Pet immunity installation height: 2.2-2.4M

### 2.Don't do:



Don't close to high-tension cable




Don't install at any no fixed places



Don't install toward metal stuff



Don't install toward the sunshine

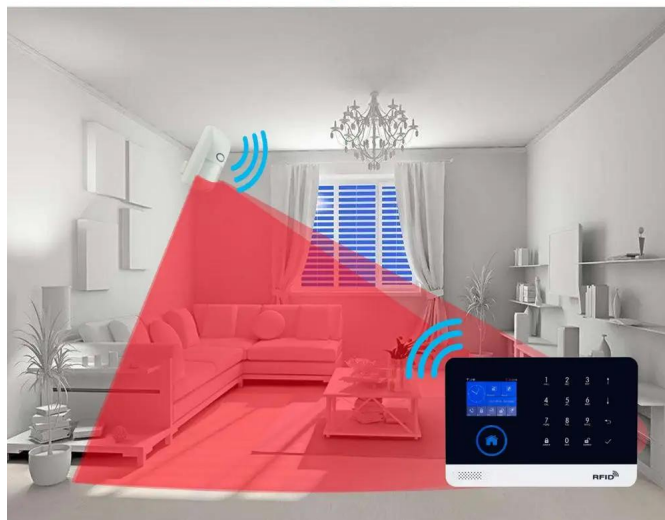

## HOW ABOUT OTHER CHOICE?



## HOW ABOUT OUR COMPANY?



## CUSTOMER



## EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



## CERTIFICATE



## HOW TO COOPERATION?





## PACKAGING & SHIPPING

Detection+Packing+Sealing+Finishing+International Express



Inquiry



Contract



Testing and packing



Receiving



Reply

Receive payment&Product

Delivery



## FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed

samples are acceptable.

Q:What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days.

Q:What is your MOQ?

A:No MOQ limit, the more quantity the more discounts.

Q:How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea),or appointed by buyer,7-15 days.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.