

Wireless door sensor

Fireproof ABS shell

DC 12V power supply

Wireless frequency 315Mhz/433Mhz optional

Wireless signal transmission distance max 100m

SMQT®



• Parameter

SMQT®



Specification	
Product name	Wireless Magnetic Door sensor
Model number	EB-130
Operating Voltage	12V
Operating distance	40 ± 5 (mm)
Transmission frequency	315MHZ / 433MHZ
Transmission distance	≤100m

• Introduction


SMQT®

The wireless door contact sensor is the magnetic sensor switch 12v and wireless curtain alarm sensor for alarm system.

PRODUCT PICTURE

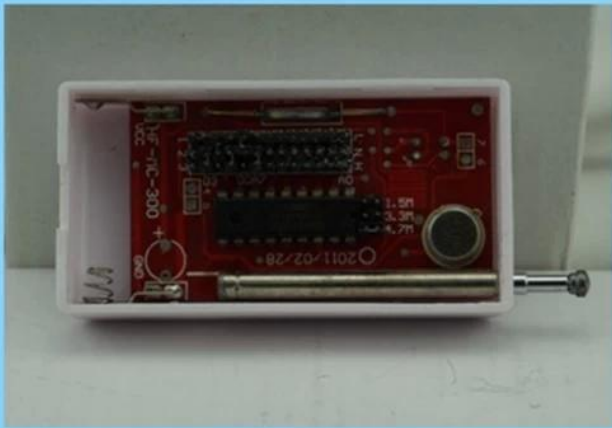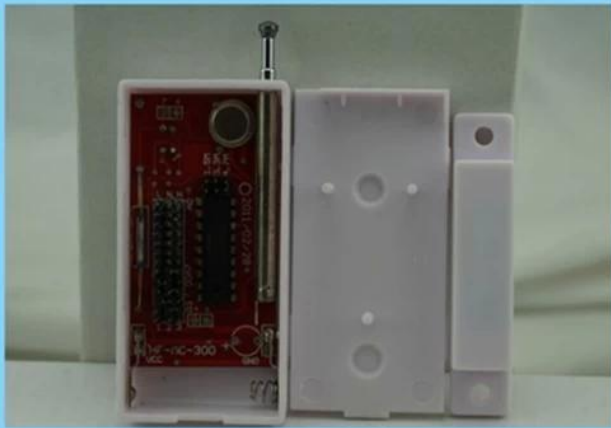

PRODUCT FEATURE

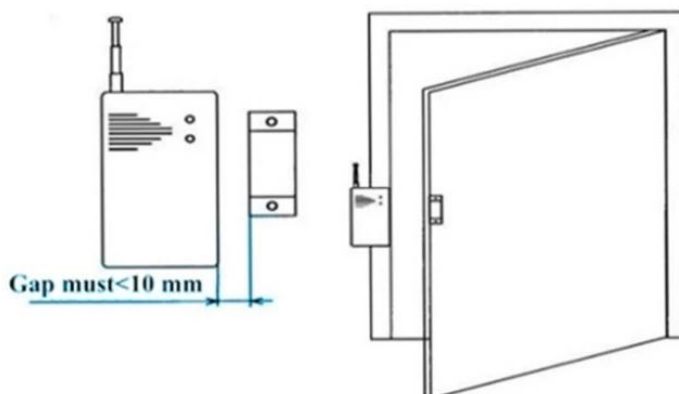

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

- 1、Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
- 2、Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

