

# Wired magnetic contact sensor

*NC/NO mode optional*

*20±5(mm) gap distance*


*MAX voltage≤100V DC,MAX current≤500mA*

*Suitable for wooden door or window*

*White/Brown color optional*

*12g weight*

**SMQT®**

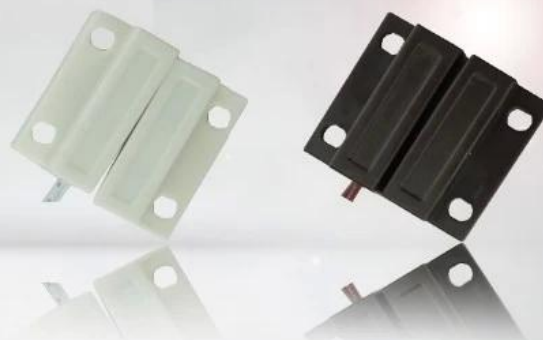

## • Parameter

**SMQT®**

Specification	
Product name	Wired Magnetic Door Contact Sensor
Model number	EB-134
Dimensions	24L * 14W * 6H (mm)
Connection	Normally open / normally closed
Operating distance	20 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Non-ferrous door or window
product weight	10g

## • Introduction

**SMQT®**

The magnetic door access control system and magnetic door alarm is the magnetic detector door contact switch door sensor.


# PRODUCT FEATURE



• *Feature*

**SMQT**

# PRODUCT FEATURE

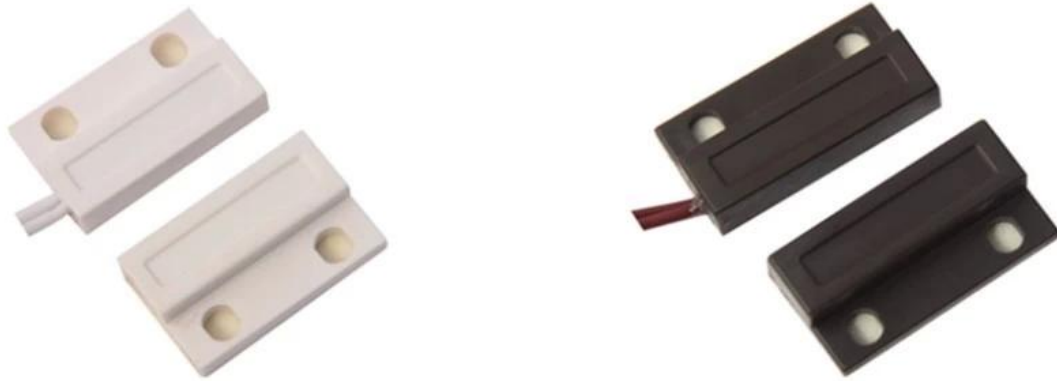

EB-134

Dimension: 24×41×6(mm)

NO/NC mode optional (default is NC mode)

20±5(mm) Gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

---

● *Packaging & shipping*

SMQT®





## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....