

1.Specifications:

EB-851 Alarm Control Panel product name dimension 256x236x69mm Running current Less than 50mA **Received frequency** 315 MHz (or 433 MHz) Alarm area 8 Wired, 16 Wired Recording time 10-20 seconds password 2groups 6 numbers material Steel box and ABS keypad Alarm mode Alarm center, telephone, alarm **Operating voltage** AC 220V Less than 200mA Alarm current Communication format ADMCO4 + 2, CIDPhone, button Alarm mode telephone number Group 6 Wired alarm input NO / NC

2. Features:

high speed digital communication,

• Different programmable settings, such as alarm tone, zone type, recording, monitoring, remote control, telephone number, telephone line check, etc.

 \blacklozenge 8 arm mode, exit arm border arm, single zone arm, delay arm, remote arm and preset time arm

♦ 6 DIAARM mode: single-zone release of the keyboard password release, long-range disarm, remote disarm, disarmed alarm

 \blacklozenge 8 zone mode, instantaneous zone delay zone 24 hours zone, boundary zone, fire alarm area, gas zonecheck area, by-pass zone

• Remote control function External display, remote monitoring

• Emergency search record record, you can save 50 record information "watch dog" function, to avoid system shutdown

• Telephone line fault detection function: When the telephone line is cut or shorted, the system will alarm.

♦ Alarm dialing priority

 \blacklozenge When the AC power is off, the backup DC 12V 7Ah rechargeable battery supports the operation


• Eight-way output module can be customized output: linkage output; remote control output (mainly used for monitoring, control of household appliances, lamps and other connections)

Physical shooting




How to use it

A. Wired keypad

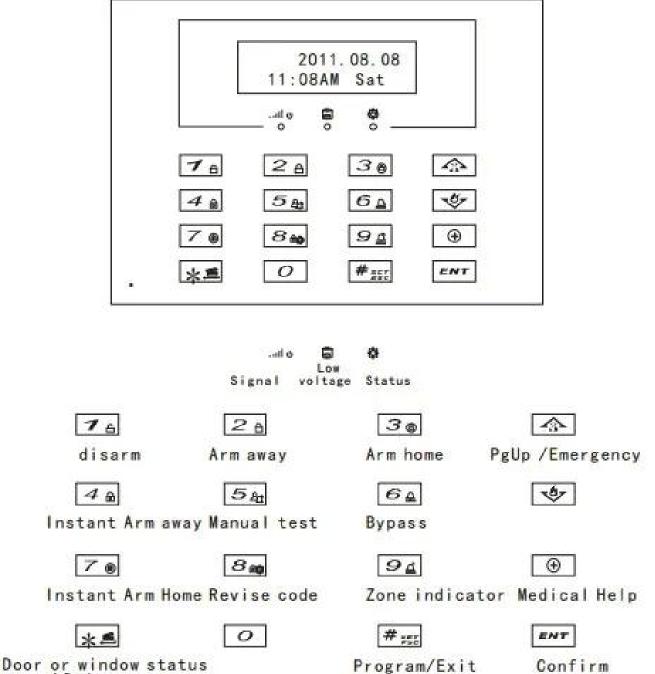

\Delete

Confirm

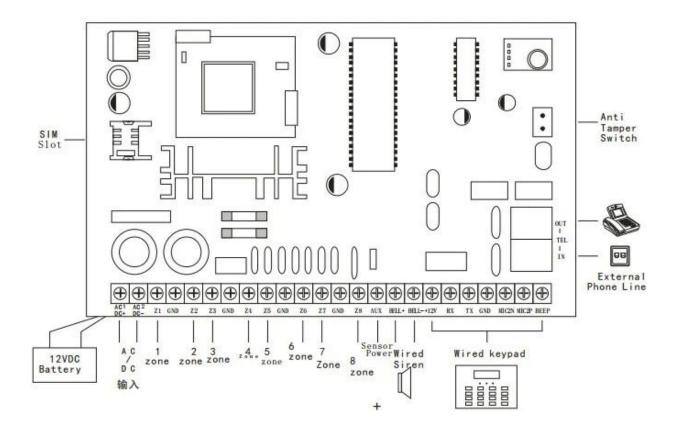

Related items



Office display



client



exhibition



Certification




how to cooperate

PACKAGING & SHIPPING

Detection+Packing+Sealing+Fnishing+International Express





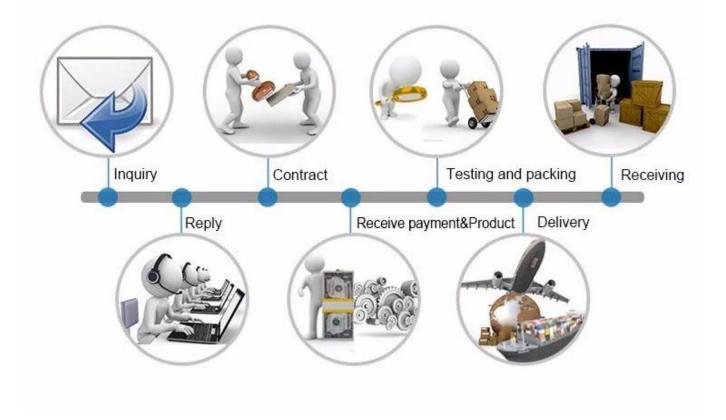

common problem

Q: Can you give me a sample list?

One:Yes, we are willing to provide sample orders for you to carry out quality inspection. Mixed samples are acceptable.

Q: What is the lead time?

One:Samples need 1-3 working days, a large number of production time required 10-15 days of orders less than 5000pcs.

Q: Are you limited?

One:EXW is 100pcs under the blank box.

Q: How do you ship the goods and how long will it take to arrive?

One:Samples will be sent to your optional shipping service (courier, air, and shipping). delivery time Depending on shipping service.

Q: If I want to print the logo, how will we make the order?

One:First, we will prepare works of art for visual confirmation. If the color and position are correct, we will Start by taking pictures from silk printing and taking pictures for your second confirmation Mass production.

ask: Does the alarm panel work with any sensor?

One: The alarm panel can work with all dry contact cable detectors and wireless detectors, including almost all

Wireless sensors from Chinese manufacturers. Wireless coding and decoding is EV1527 or Our wireless sensor