

Specification	
Product name	card reader door entry system,access control ip65,13.56mhz rfid reader
Model	EA-83
Operating Voltage	$DC12V \pm DC3V$
Power consumption	<2W
Card Type	13.56MHZ IC
Reading distance	60mm
Store records	10000
registered user	10000
communication method	RS485
Transmission rate	9600bps (N, 8,1)
Storage memory	4MbitsFLASHMemory
Dimensions	96L * 96W * 22H (mm)
Housing Material	PC
Operating temperature	-30 °C ~ + 65 °C
Open the door	Credit card
Device Color	Black or white

What Features of our door entry system?





2 Color optional

Door bell button

Imported PC material shell


High safety performance, with waterproof (waterproof rating IP66) tamper. Has a reverse current protection, lightning protection, anti-crash design, self-detection. Built-in card reader, external card reader can also achieve bi-directional swipe. Plug-in terminal for easy installation.

Free software, features simple and clear, easy to operate.

## **IN-KIND SHOOTING**



# **APPLICATION**

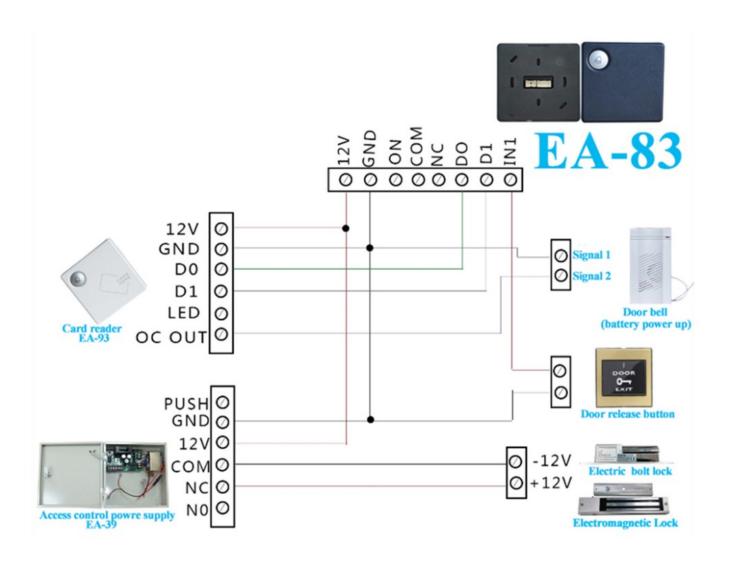

# **SHOW CASE**



# **OFFICE SHOW**













# **CUSTOMER**














# **EXHIBITION**



## **CERTIFICATE**



# **HOW TO COOPERATION**

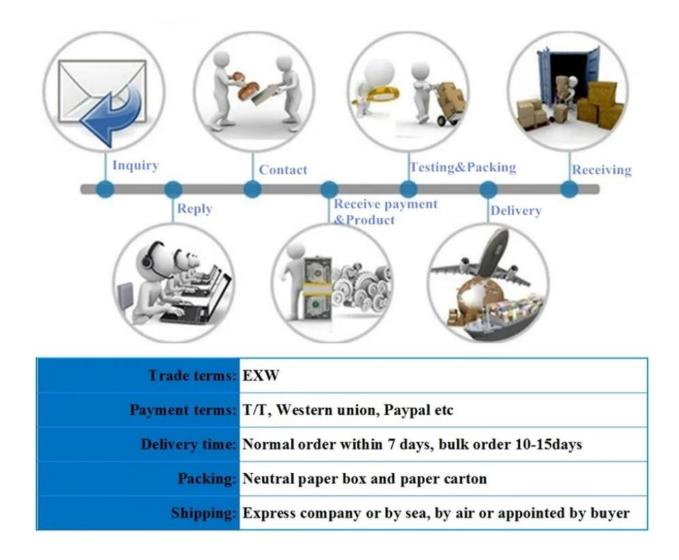

# **FAQ**

## Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

#### O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

## Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

## Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

## Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

## **Q:** Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.