



what details of our EB-839 auto dial alarm system?

1. Specification:

Model	EB-839 commercial security alarm systems
Dimension	7"Touch Screen,true color display
Operating	Sound Alarm/spot monitoring
Operating power	9-15V DC
way of disarm/arm	Arm/Disarm by remote controller/hot keypad/wireless keypad,mobile phone
Connect to network	Compatible with protocol "CID"
Received freq	315/ 433MHz /868MHZ
Alarm zones	31wireless
Rechargeable battery	Backup battery/low battery alert

2. Features:

1, 7 "color screen, graphic display, friendly man-machine interface.

2, [**Multi-languages**](#) optional (simplified Chinese, traditional Chinese, English, German, French, Russian...etc.)

3, 3/4 band GSM alarm information transmission, the realization of the telephone voice alarm, protection zones/SMS alarm;

4, [**30 wireless defence areas**](#), extensible 8 wired defence areas and wired siren . preset up five groups of alarm telephone, each group can be arbitrary set to phone call or SMS alarm, automatic cycle dial;

5, Intelligent logic analysis technology, while alarm, display the corresponding protection zones , installation location, name of probe ,etc...

6, Alarm priority, random recording, voice alarm, SMS alarm, on-site monitoring, power off information preservation, AC/DC power supply optional;

7, Text messaging, remote controller, host keypad, remote control keypad (optional), long distance telephone five ways control arm/disarm ;

8, Doors & windows condition monitoring automatically, can be extended to realize the wireless doorbell "ding dong" function;

9, Host low-voltage alarm;

10, "One-click" arm operation , "learning type" match the wireless detector, configure up to eight remote control; 29 wireless defence areas , each area configure max with four detectors;

11, Prompt function of defence areas detection in disarm conditions , can track the children

12, [**Detectors low-voltage alarm, and display the low-voltage detector name and location ;**](#)

13 Bypass and open each defence area , defence areas type, enter time delay ,can be set via the menu Settings.

14, High capacity lithium battery, perfecting system self-inspection, can prompt telephone wire cut , battery low voltage, without external electricity.


15, [A "black box" data record function](#), can store 99 operation and alarm information;

16, Compatible with "CID" protocol;

17, [the elderly and children foster care](#)



APPLICATION

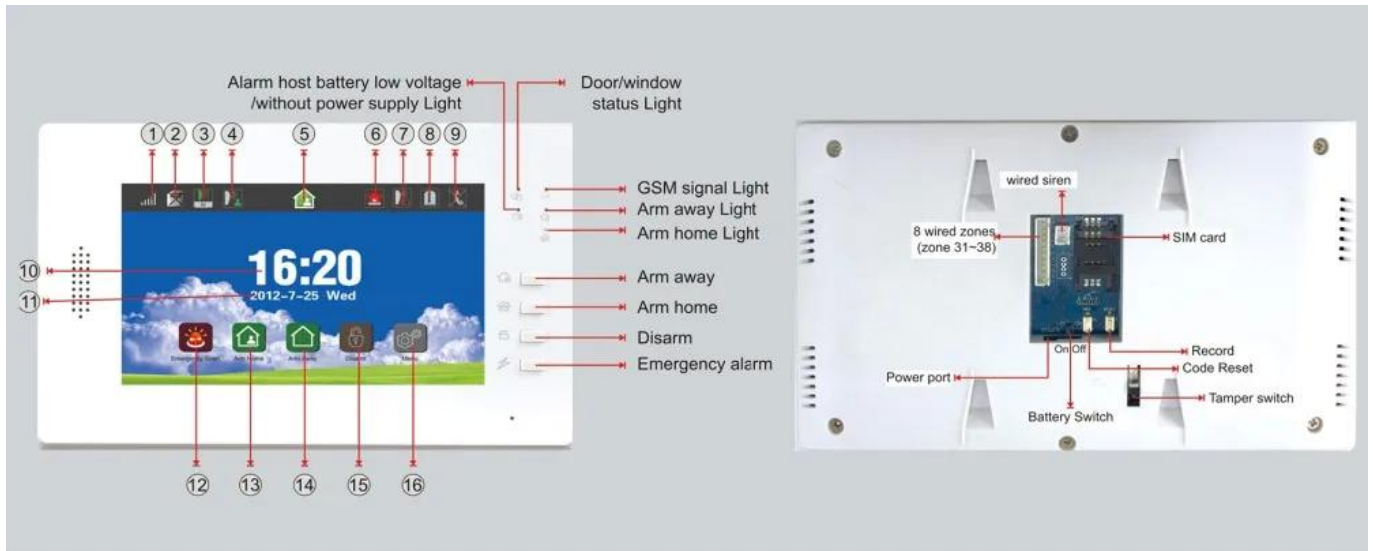

• INTRODUCTION ABOUT STANDBY SCREEN IN STATUS BAR

1. "GSM signal level" icon: max 5 level, means strongest signal;
2. "SIM card": it would with icon there if SIM card insert correctly, or else, it won't with this icon there
3. "Sensor triggered": the sensor name and zone No. will be displayed for 4 seconds in disarm status if get triggered.
4. "Zone monitoring notification" : this icon will be displayed when this zone is triggered if the zone monitoring notification function is activated;
5. " Arm/Disarm status"icon: this icon will flash during exiting delay, and keep solid light after exit delay.And icon will flash during arming home delay, and keep solid light after arm home delay. And it will display icon during disarm status.
6. With alarms records: this icon will keep solid light until you check alarm records (It display the latest alarm event)
7. low voltage: any sensor get low-voltage, this icon will keep solid light until you check details. (only for the sensors which with low-voltage signal transferring function)
8. Door/Window status: Any door left open, it will show the related zone number there, and update every 2 seconds
9. Phone line: this icon will displayed when phont line cut
10. Time11. Year/Month/Date/Week
12. Emergency alarm
13. Arm home
14. Arm away
15. Disarm
16. Enter into menu: click, then input 4- digits code, it will take you into main menu page.



EB-839 Touch screen gsm burglar alarm system with CID monitoring dial



OFFICE SHOW



CUSTOMER



EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



CERTIFICATION



HOW TO COOPERATE



PACKAGING & SHIPPING

Detection+Packing+Sealing+Finishing+International Express



Inquiry



Contract



Testing and packing



Receiving



Reply

Receive payment&Product

Delivery



FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acceptable.

Q:What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days.

Q:What is your MOQ?

A:No MOQ limit, the more quantity the more discounts.

Q:How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea),or appointed by buyer,7-15 days.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.