

• *Parameter*

SMQT

Nome do Produto	Digital Vigas Ativo detector infravermelho
Modelo	ABH
distância detectar	Indoor: 150m 300m 450m 600m 750m Outdoor: 50m 100m 150m 200m 250m (opcional)
Tensão operacional	13,8 ~ 24VDC 11 28VAC ~
corrente de operação	40-65mA
velocidade indicação	50 ~ 700m / seg
saída anti-demolição	NC
temperatura ambiente	-20 °C ~ + 50 °C
saída de alarme	NO / NC
ajuste de nível	180 ° ± 90 °
ajuste vertical	± 10 °
Cor	Preto
Material	resina de PC

• *Introduction*

SMQT


PRODUCT PICTURE



O laser fotoelétrico sensor de feixe de barreira de segurança de infravermelho é usado ao ar livre e à prova de água infravermelho interruptor do sensor.

•Dimension

SMQT[®]

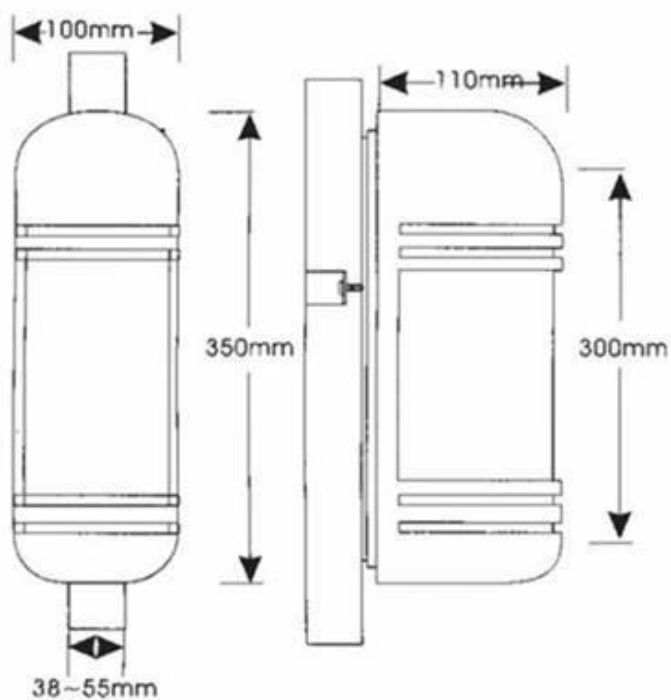

•Feature

SMQT[®]

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity(AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

estrutura de integração 1. Sealed é capaz de trabalhar no ambiente de hash.

2. Confronted com nevoeiro ou mau tempo, os detectores irá regular automaticamente a sensibilidade (circuito AGC).

3. Easily ajustar e calibrar o ângulo óptico horizontal / vertical.

telescópios ópticos integrados 4. Built-in, use o profissional anti-jamming jaqueta.

circuito 5. Anti-relâmpago projetada.

-Power 6.High receptor de infravermelhos da tubos, digital de baixo consumo de energia.

• *Packaging & shipping*

SMQT®



• *Office show*

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

