

## Detector de fumaça de cigarro



Parâmetro	
Nome:	Detector de fumaça de cigarro
Tamanho:	Ø106mm * 59mm
Tensão de trabalho:	Bateria de 9V 6F22
Corrente de espera:	≤ 15uA
Corrente de alarme:	≤56mA
Vida útil da bateria:	Menos de 1 ano
Indicador de energia:	RLED ed
Indicador de alarme:	Red LED flash pisca
Pressão sonora:	85dB / m
Temperatura de trabalho:	-10 ° C ~ 50 ° C
Umidade de trabalho:	≤95% RH
Distância de transmissão:	& lt; 100m (área aberta)
Executar critério:	EN14604
Área de detecção:	40 metros quadrados quando a altura de instalação entre 6 a 12 metros. 20 metros quadrados quando a altura de instalação dentro de 6 metros.

**Quais são as características do nosso detector de fumaça de cigarro?**



9V 6F22 battery, wireless output 315MHz or 433MHz

Sound & flash alarm wireless fire alarm smoke detector

Dust-proof, moth-proof and anti-Interference function

Suitable for detecting the smoke in house, shop, hotel...


2 years warranty, welcome to do OEM and ODM

**IN-KIND SHOOTING**



## APLICAÇÃO

# Standalone Gas detector

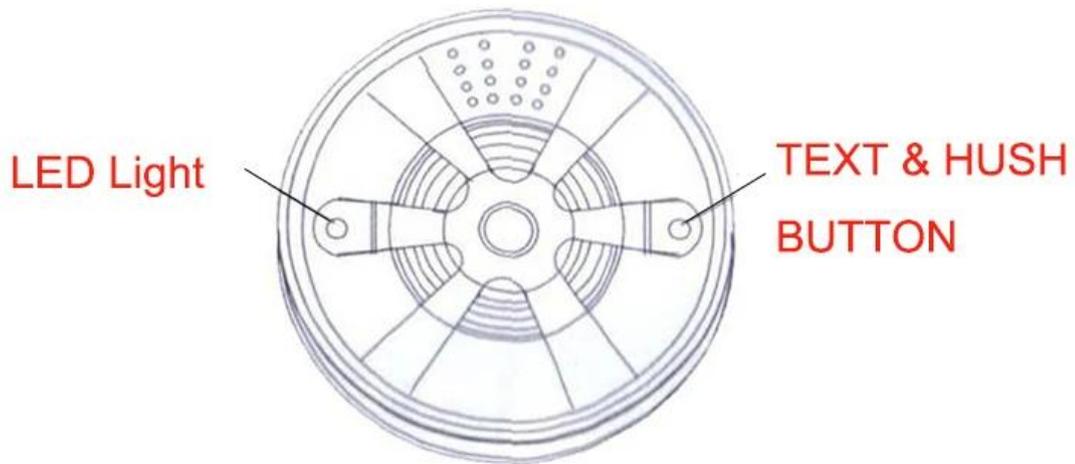

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

## COMO SOBRE OUTRA ESCOLHA?

