

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA


Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

SMQT®

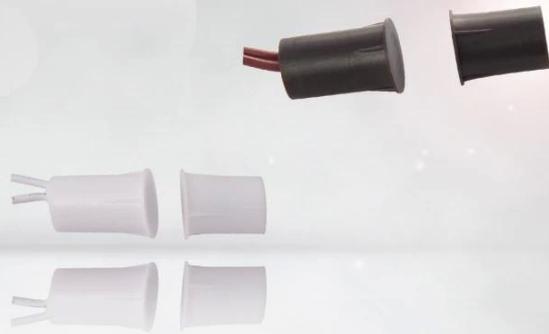

• Parameter

SMQT®

Parâmetro	
Nome do Produto	Oculto magnético sensor de contato
Modelo	EB-135
Dimensão	Φ10 × 18,5 (mm)
Modo de código	NO / NC (opcional)
lacuna	20 ± 5 (mm)
Tensão máxima	≤ 100V DC
Corrente máx.	≤500mA
Classificação máxima	≤ 10W
Cor	Castanho / Branco (opcional)
Adequado para	Porta ou janela de madeira
Material	Caixa anti-incêndio ABS
Temperatura de trabalho	-10 °C ~ 50 °C
Peso líquido	8g

• In-kind shooting

SMQT®



• *Feature*

SMQT



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

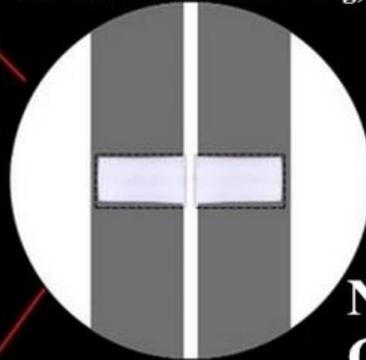


Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

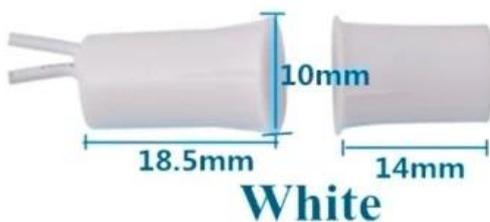

• Packaging & shipping

SMQT®

Lista de embalagens	
Nome do Produto	Sensor de contato magnético oculto EB-135
Quantidade	2000 pcs por caixa
Tamanho do cartão	38 * 30 * 30 (cm)
Peso	21kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....