

## • *Parameter*

**SMQT**

Tensão operacional	CD12V
saída da fechadura elétrica	3A
corrente quieta	30mA
saída de alarme	20A
distância de leitura	IC 3-6cm 5-8cm ID
tempo de proteção de curto-circuito de saída	100us
usuário armazenar	2000
horário de funcionamento	0-99s ajustável
Temperatura ambiente	-45 °C ~ 60 °C
dimensões	120L * 58W * 18H

## • *Introduction*

**SMQT**



Novo design exterior, o estilo de Mercedes-Benz, luxo, atmosfera, estável e seguro.

concha de metal, impermeável anti-esmagamento design.



PC plástico selado, totalmente selado projeto impermeável.

Grau de proteção de IP68.

backlight chave, fácil de usar.



• *Installation*

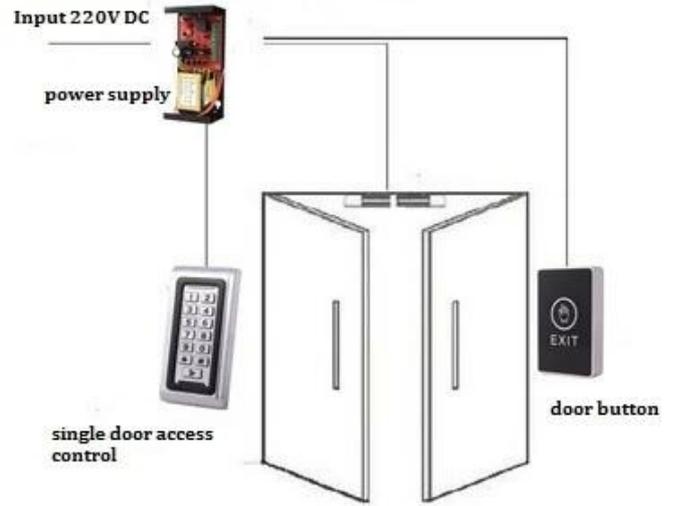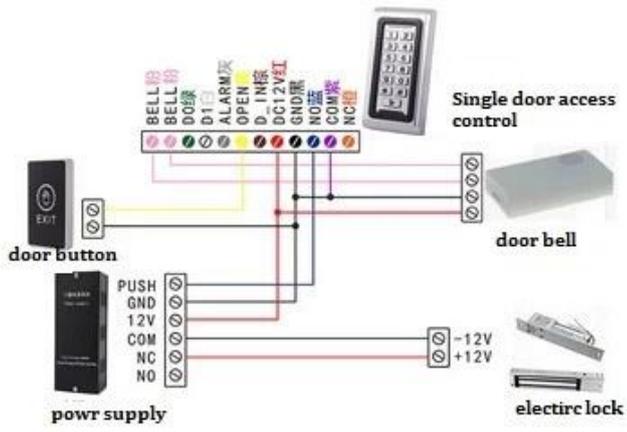

• *Feature*

SMQT



*Single door access control keypad*

*Working voltage 12V DC*

*Card capacity 2000 pcs*

*IC(13.56Mhz)/ID(125Khz) card type optional*

*Waterproof, suitable for outdoor*

*Button with LED back light*

O sistema de controle de acesso porta com o leitor de cartão wiegant e teclado de controle de acesso digital, acesso porta botão de apertar, fonte de alimentação, cartão RFID.

---

• *Packaging & shipping*


SMQT





## ● Office show

SMQT®

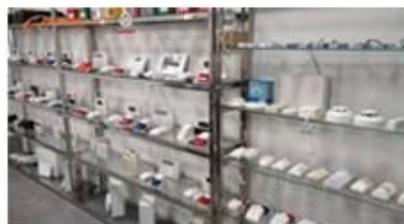

## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair