


Especificação	
Nome do Produto	Sensor magnético sem fio da porta
Modelo do produto	EB-130A
Fonte de energia	23A, bateria de 12V
Corrente quieta	≤10UA
Corrente de alarme	≤25MA
ambiente de trabalho	Temperatura de 10 °C ~ 50 °C umidade relativa ≤97%
Distância de transmissão	Área aberta 100 m
Dimensões	65 * 38 * 20 (mm)
Local de instalação	Portas, janelas
Material da carcaça	abdômen

- 1, design de circuito de chip único, processamento inteligente, estável e confiável.
- 2, com função de detecção de baixa tensão.
- 3, o transmissor sem fio de radiofrequência que suporta o uso do painel de controle.
- 4, design compacto, boa aparência, fácil instalação.
- 5, monitorar e controlar todos os tipos de portas e janelas e fora.



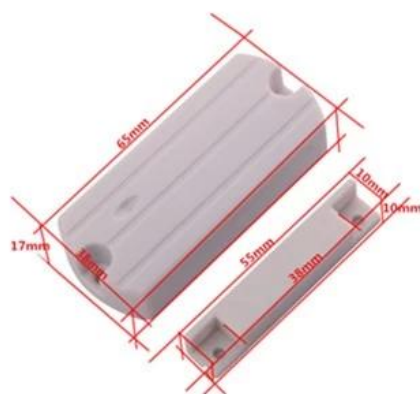

● Installations

SMQT



▲ *Installation*

Selected installation area ondoor or window, then fixtured it with screws.

Note: The gap must < 45mm.

The working environment should be dry and clean.

● Packing list

SMQT

Lista de embalagem	
Nome do Produto	Sensor magnético sem fio da porta
Qtde	200 pcs / caixa
Tamanho da caixa	40 * 30 * 20 (cm)
Peso	10Kg



● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....