




| <b>Especificação</b>      |   |
|---------------------------|---|
| Nome do Produto:          | Detector de fumaça autônomo, sensor de fumaça sem fio, fumaça de alarme   |
| Tamanho:                  | Ø106mm * 59mm   |
| Tensão de trabalho:       | Bateria 9V 6F22   |
| Em espera Corrente:       | ≤ 15uA  |
| Alarme atual:             | ≤56mA   |
| Vida útil da bateria:     | Menos de 1 ano  |
| Indicador de energia:     | RLED ed   |
| Indicador de alarme:      | Rflash LED piscar   |
| Pressão sonora:           | 85dB / m  |
| Temperatura de trabalho:  | -10 ° C ~ 50 ° C  |
| Umidade de trabalho:      | ≤95% de HR  |
| Distância de transmissão: | & It; 100m (área aberta)  |
| Executar critério:        | EN14604   |
| Área de detecção:         | 40 metros quadrados quando a altura de instalação entre 6 a 12 metros.<br>20 metros quadrados quando a altura da instalação dentro de 6 metros. |

**Quais são as características do nosso detector de fumaça?**

# Standalone Gas detector

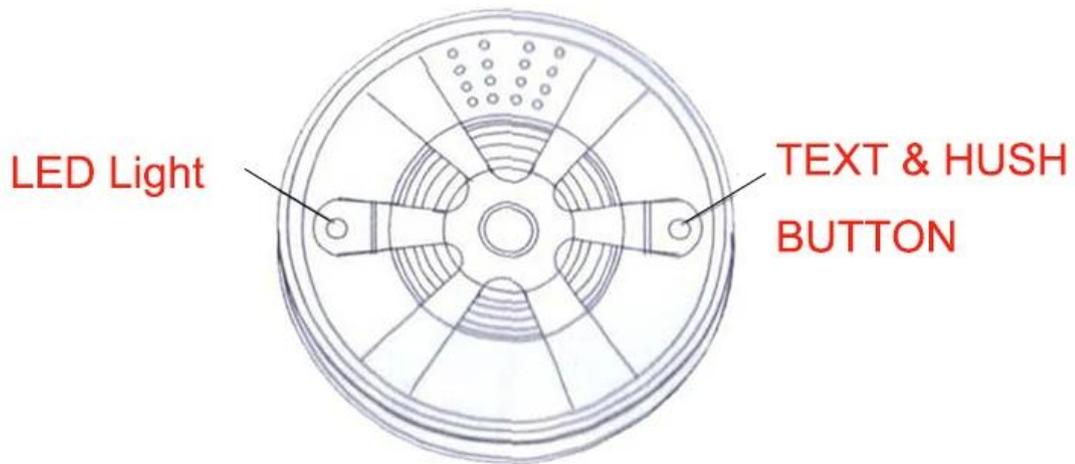

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

**TIRO IN-KIND**



## MOSTRUÁRIO



## SHOW DO ESCRITÓRIO



## CLIENTE



## EXIBIÇÃO



## CERTIFICADO



## COMO COOPERAÇÃO



|                       |  |
|-----------------------|--|
| <b>Trade terms:</b>   | <b>EXW</b>   |
| <b>Payment terms:</b> | <b>T/T, Western union, Paypal etc</b>                          |
| <b>Delivery time:</b> | <b>Normal order within 7 days, bulk order 10-15days</b>        |
| <b>Packing:</b>       | <b>Neutral paper box and paper carton</b>                      |
| <b>Shipping:</b>      | <b>Express company or by sea, by air or appointed by buyer</b> |