

	Especificação
Nome do Produto	Detector de movimento com fio Pir
Modelo	EB-181
Dimensão	89 × 52,5 × 38,5 (mm)
Tensão de operação	12V DC
Corrente de consumo	18mA 12 DC
Detectando a distância	12m
Ângulo de detecção	110 °
Saída de alarme	NO / NC
Modo de instalação	Montado na parede
Altura de montagem	2,2 m
Material	Caixa anti-incêndio ABS
CONDUZIU	ON / OFF (opcional)
Temperatura de trabalho	-10 °C ~ 50 °C
Cor do escudo	Branco
Peso líquido	0,096 kg





O mini sensor do pir do movimento é o sensor do pir detetou o sensor para o sistema de alarme.

• *Feature*


SMQT

Controle da lógica 1. Intelligent, alarme anti falso eficientemente
2. Auto compensação de temperatura
3. Ajuste da contagem de impulsos

4. Anti interferência luz branca

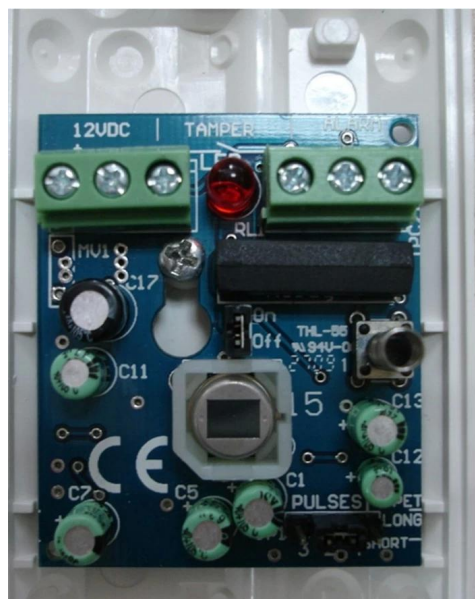


- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB




- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT

Detecting Area View

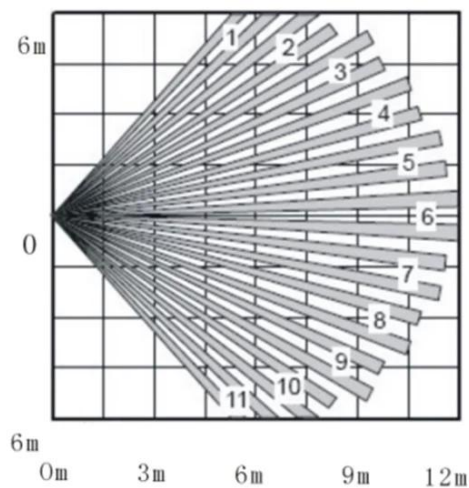

Planform

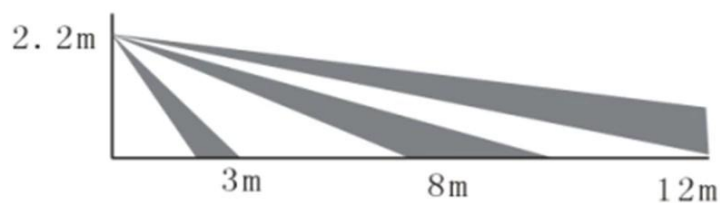

Side View

• Packaging & shipping

SMQT



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....