Parameter

SMQT

	Especificação
Nome do Produto	Detector de movimento com fio Pir
Modelo	EB-181
Dimensão	89 × 52,5 × 38,5 (mm)
Tensão de operação	12V DC
Corrente de consumo	18mA 12 DC
Detectando a distância	12m
Ângulo de detecção	110 °
Saída de alarme	NO / NC
Modo de instalação	Montado na parede
Altura de montagem	2,2 m
Material	Caixa anti-incêndio ABS
CONDUZIU	ON / OFF (opcional)
Temperatura de trabalho	-10 ℃ ~ 50 ℃
Cor do escudo	Branco
Peso líquido	0,096 kg

Introduction

SMQT

O mini sensor do pir do movimento é o sensor do pir detetou o sensor para o sistema de alarme.

•Feature

SMQT

Controle da lógica 1.Intelligent, alarme anti falso eficientemente
2.Auto compensação de temperatura
3. Ajuste da contagem de impulsos

4.Anti interferência luz branca

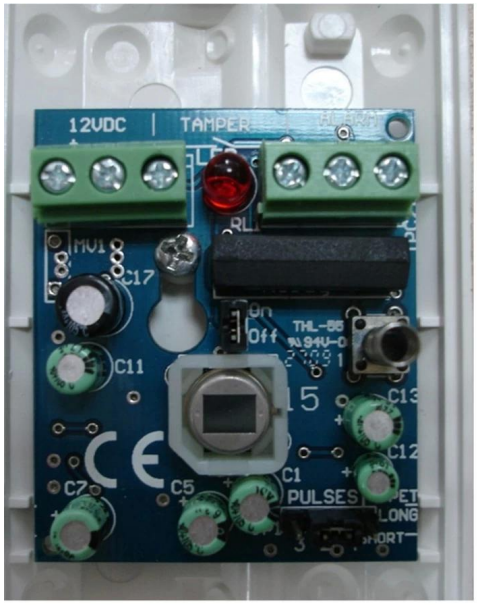



❶Wire Exit
❷Terminal Block
❸Anti-dismantle Switch
❹Relay
❺LED Indicator
❻LED Jumper
❼Relay Jumper
❽Dual Element IR Sensor
❾Thermistor Resistance
❿Pulse Jumper
⓫PCB



+12V	DV ANODE
GND	DV CATHODE
ALARM	ALARM OUTPUT PORT
TAMPER	ANTI-TEMPER OUTPUT PORT

Detecting Area View

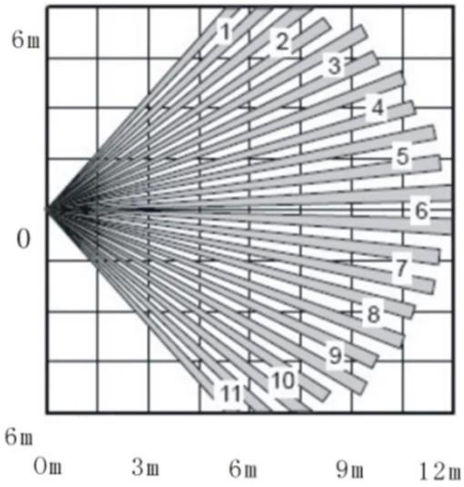

Planform

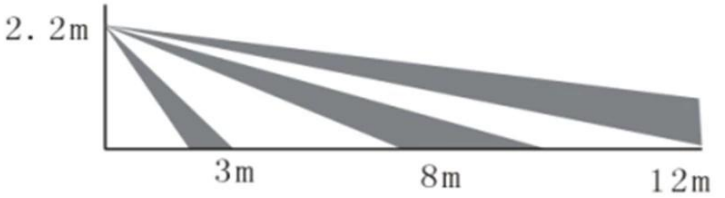

Side View

•*Packaging & shipping*

SMQT

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair